Productdatablad

LORO_Produkt-Datenblatt_58110.150X_nl.pdf
Artikel 58110.150X
30.10.2026, 00:56 uur

LX-VERBUNDROHR M. BEGLEITHEIZUNG DN150 3

LORO multilayer pipe with trace heating

Bestektekst

LORO-X compound pipe consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 3000 mm long, DN150, with self-regulating trace heating with connecting cable 3 x 1.5 mm², cable length ca. 1 m

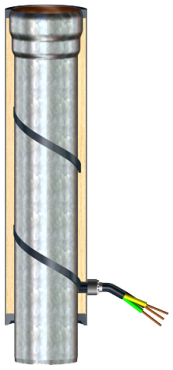

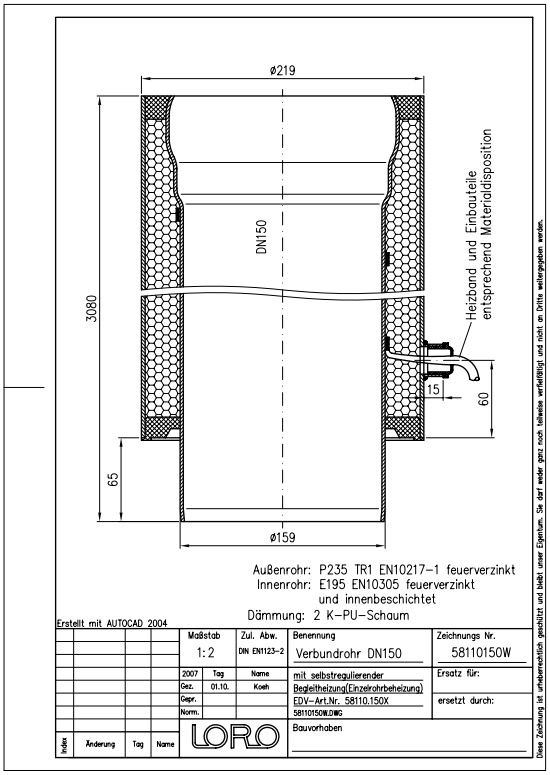

Artikelgegevens

EAN-code	4038088039366
ETIM Klasse	EC010225
Nominale diameter	DN 150
Nominale lengte/graad	3000
Buitenafmetingen (HxBxL)	241 x 219 x 3080 mm
Gewicht	90,00 Kg (STK)
Productgroep	3
Douanetariefnummer	73063018
Materiaal / Kleur	Stahl feuerverzinkt, Silber

Gebruiksaanwijzing

kein Verwendungshinweis notwendig

Downloads

Maattekening (PDF)
Brochure (PDF)
CAD 2D (DXF)
CAD (DWG)

Alles online