


LX-VERBUNDROHR M. BEGLEITHEIZUNG DN70 30

LORO multilayer pipe with trace heating

Κείμενο προδιαγραφών

LORO-X compound pipe consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 2000 mm long, DN70, with self-regulating trace heating with connecting cable 3 x 1.5 mm², cable length ca. 1 m

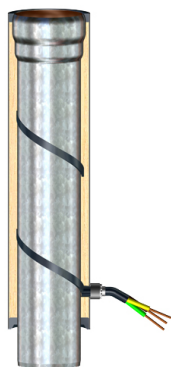


Στοιχεία προϊόντος

Κωδικός EAN	4038088039298
Κατηγορία ETIM	EC010225
Ονομαστική διάμετρος	DN 70
Ονομαστικό μήκος/μोίρες	2000
Εξωτερικές διαστάσεις (ΥxΠxΜ)	125 x 102 x 2055 mm
Βάρος	18,40 Kg (STK)
Ομάδα προϊόντων	3
Δασμολογικός αριθμός	73063012
Υλικό / Χρώμα	Stahl feuerverzinkt, Silber

Σημείωση χρήσης

kein Verwendungshinweis notwendig

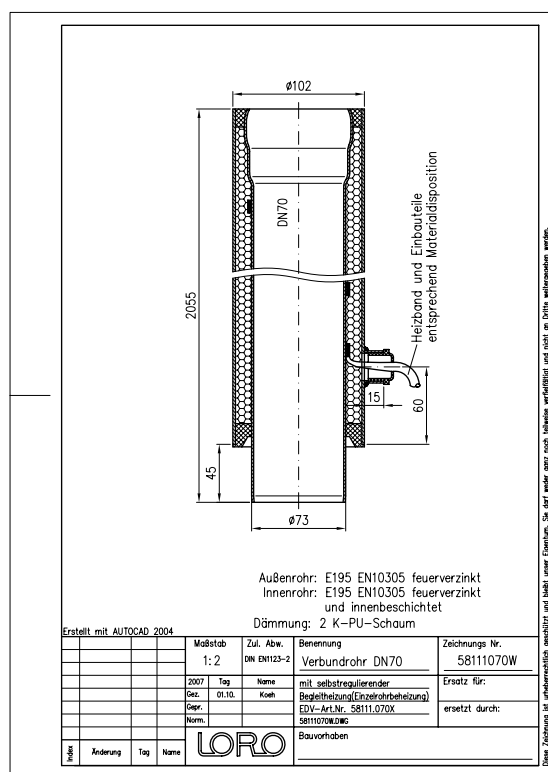

Λήψεις



Alles online

[Σχέδιο διαστάσεων \(PDF\)](#)

[CAD \(DWG\)](#)

[Φυλλάδιο \(PDF\)](#)

[CAD 2D \(DXF\)](#)