Produktdatablad

LORO_Produkt-Datenblatt_58111.100X_dk.pdf
Artikel 58111.100X
29.10.2026, 20:09

LX-VERBUNDROHR M. BEGLEITHEIZUNG DN100 2

LORO multilayer pipe with trace heating

Udbudstekst

LORO-X compound pipe consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 2000 mm long, DN100, with self-regulating trace heating with connecting cable 3 x 1.5 mm², cable length ca. 1 m

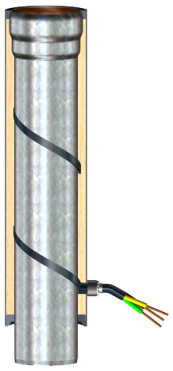

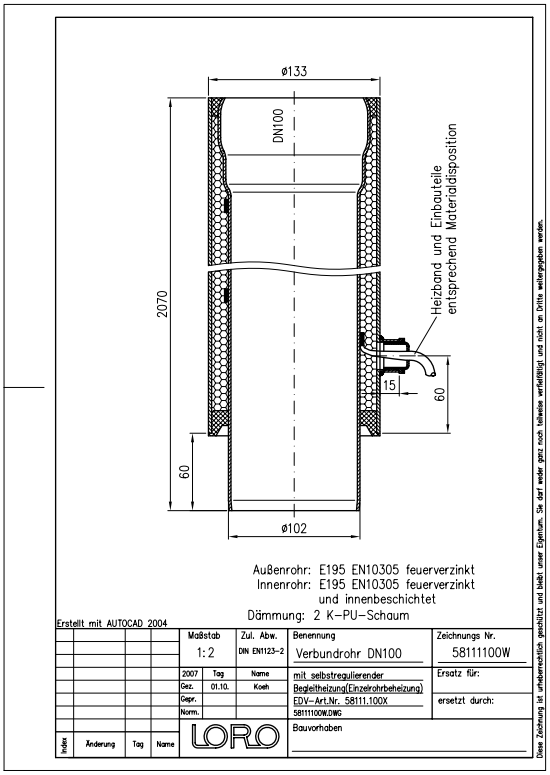

Artikeldata

EAN-kode	4038088039304
ETIM Klasse	EC010225
Nominel diameter	DN 100
Nominel længde/grad	2000
Ydermål (HxBxL)	156 x 133 x 2070 mm
Vægt	32,00 Kg (STK)
Produktgruppe	3
Toldtarifnummer	73063012
Materiale / Farve	Stahl feuerverzinkt, Silber

Brugsanvisning

kein Verwendungshinweis notwendig

Downloads

Måltegning (PDF)
Brochure (PDF)
CAD 2D (DXF)
CAD (DWG)

Alles online