


## LX-VERBUNDROHR M. BEGLEITHEIZUNG DN100 2

## LORO multilayer pipe with trace heating

## Tekst przetargowy

LORO-X compound pipe consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 2000 mm long, DN100, with self-regulating trace heating with connecting cable 3 x 1.5 mm<sup>2</sup>, cable length ca. 1 m

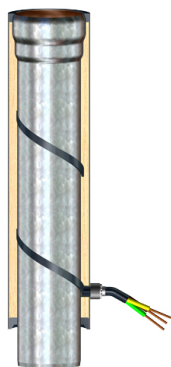


## Dane artykułu

|                            |                             |
|----------------------------|-----------------------------|
| Kod EAN                    | 4038088039304               |
| Klasa ETIM                 | EC010225                    |
| Średnica nominalna         | DN 100                      |
| Długość/stożek nominalny   | 2000                        |
| Wymiary zewnętrzne (WxSxD) | 156 x 133 x 2070 mm         |
| Waga                       | 32,00 Kg (STK)              |
| Grupa produktów            | 3                           |
| Numer taryfy celnej        | 73063012                    |
| Materiał / Kolor           | Stahl feuerverzinkt, Silber |

## Wskazówki dotyczące użytkowania

kein Verwendungshinweis notwendig

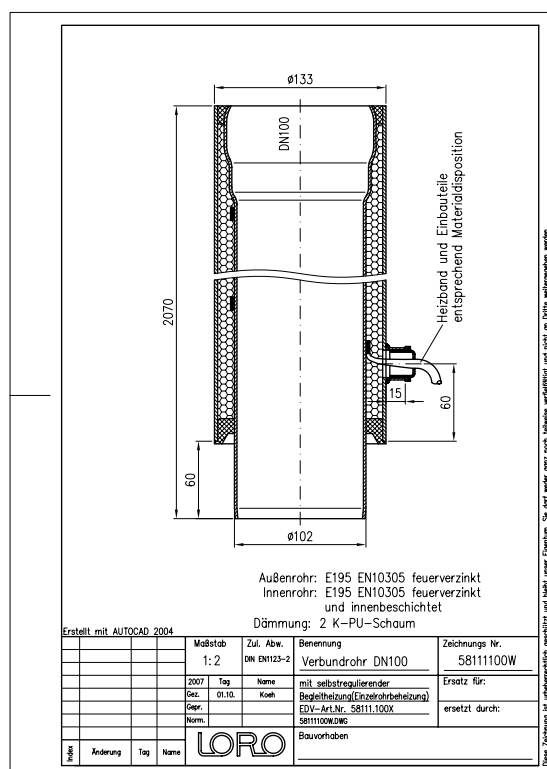

## Pobieranie



Alles online

[Rysunek wymiarowy \(PDF\)](#)

CAD (DWG)

[Broszura \(PDF\)](#)

## CAD 2D (DXF)