


## LX-VERBUNDROHR M. BEGLEITHEIZUNG DN125 2

LORO multilayer pipe with trace heating

### Bestektekst

LORO-X compound pipe consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 2000 mm long, DN125, with self-regulating trace heating with connecting cable 3 x 1.5 mm<sup>2</sup>, cable length ca. 1 m

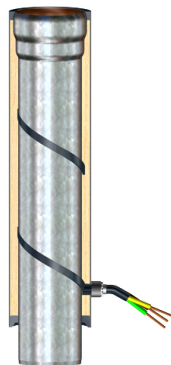


### Artikelgegevens

|                          |                             |
|--------------------------|-----------------------------|
| EAN-code                 | 4038088039311               |
| ETIM Klasse              | EC010225                    |
| Nominale diameter        | DN 125                      |
| Nominale lengte/graad    | 2000                        |
| Buitenafmetingen (HxBxL) | 191 x 168 x 2075 mm         |
| Gewicht                  | 43,00 Kg (STK)              |
| Productgroep             | 3                           |
| Douanetariefnummer       | 73063018                    |
| r                        |                             |
| Materiaal / Kleur        | Stahl feuerverzinkt, Silber |

### Gebruiksaanwijzing

kein Verwendungshinweis notwendig

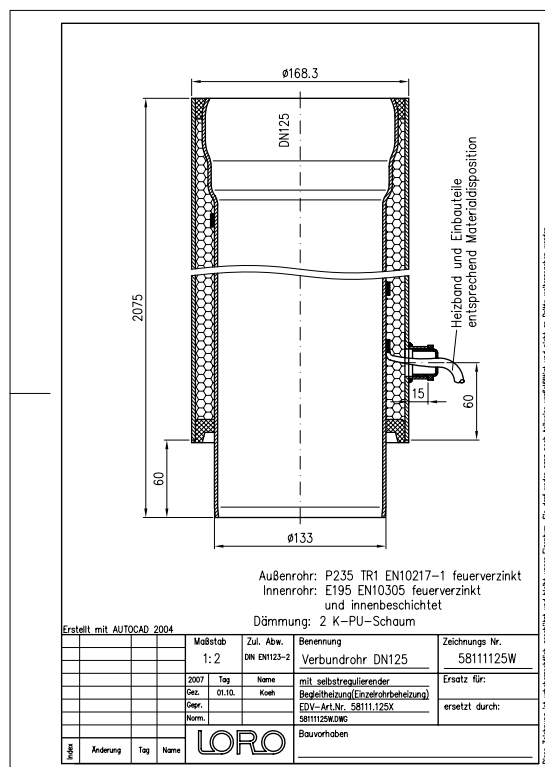

### Downloads



Alles online

[Maattekening \(PDF\)](#)

[CAD \(DWG\)](#)

[Brochure \(PDF\)](#)

[CAD 2D \(DXF\)](#)