


## LX-VERBUNDROHR M. BEGLEITHEIZUNG DN125 2

LORO multilayer pipe with trace heating

### Beskrivelsestekst

LORO-X compound pipe consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 2000 mm long, DN125, with self-regulating trace heating with connecting cable 3 x 1.5 mm<sup>2</sup>, cable length ca. 1 m

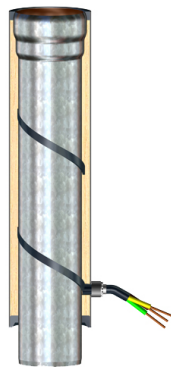


### Artikkeldata

|                       |                             |
|-----------------------|-----------------------------|
| EAN-kode              | 4038088039311               |
| ETIM-klasse           | EC010225                    |
| Nominell diameter     | DN 125                      |
| Nominell lengde/grad  | 2000                        |
| Utvendige mål (HxBxL) | 191 x 168 x 2075 mm         |
| Vekt                  | 43,00 Kg (STK)              |
| Produktgruppe         | 3                           |
| Tolltariffnummer      | 73063018                    |
| Materiale / Farge     | Stahl feuerverzinkt, Silber |

### Bruksanvisning

kein Verwendungshinweis notwendig

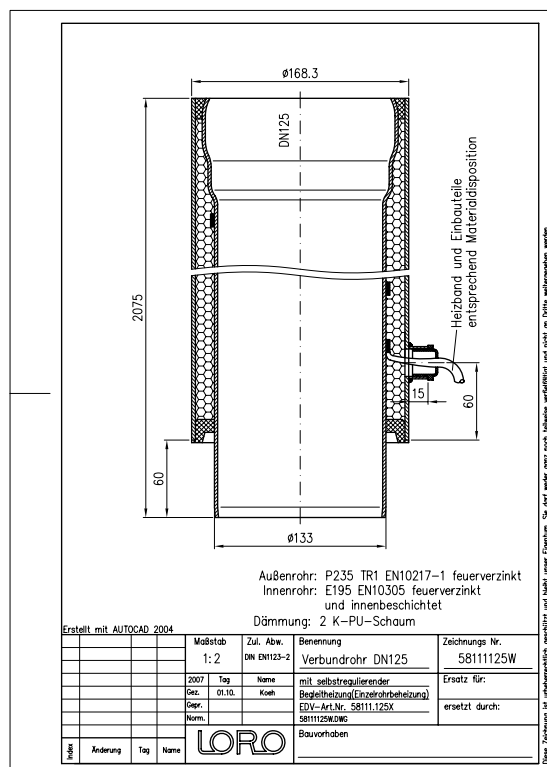

### Nedlasteringer



Alles online

[Måltegning \(PDF\)](#)

[CAD \(DWG\)](#)

[Brosjyre \(PDF\)](#)

[CAD 2D \(DXF\)](#)