# LORO-X COMPOUND PIPE WITH HEATING COIL, STANDARD TYPE

**LORO multilayer pipe with trace heating**

## Tarjouspyyntöteksti

LORO-X compound pipe consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 1000 mm long, DN70, with self-regulating trace heating with connecting cable 3 x 1.5 mm², cable length ca. 1 m with connecting cable 3 x 1.5 mm², cable length ca. 1 m

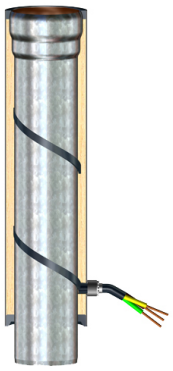

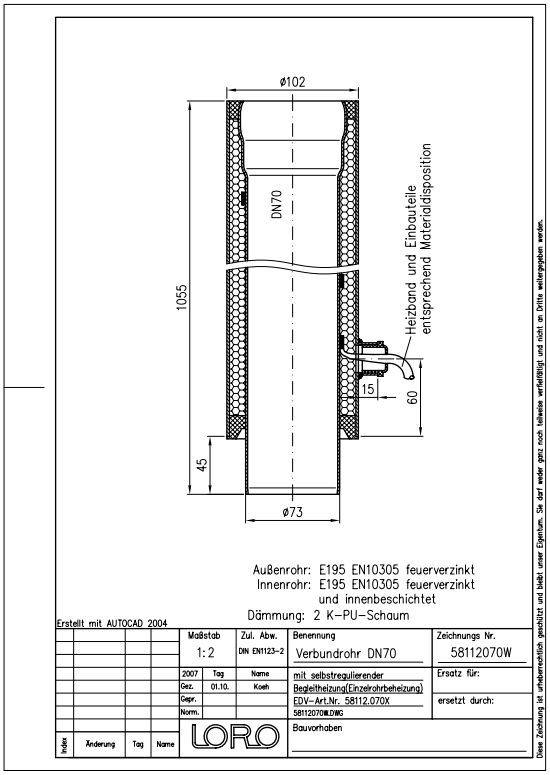


## Tuotetiedot

| | |
|---|---|
| EAN-koodi | 4038088025536 |
| ETIM-luokka | EC010225 |
| Nimellishalkaisija | DN 70 |
| Nimellispituus/-aste | 1000 |
| Ulkomitat (KxLxS) | 125 x 102 x 1055 mm |
| Paino | 10,20 Kg (STK) |
| Tuoteryhmä | 3 |
| Tullitariffin numero | 73063012 |
| Materiaali / Väri | Stahl feuerverzinkt, Silber |

## Käyttöohje

kein Verwendungshinweis notwendig

## Lataukset

Alles online

Mittapiirustus (PDF)
Esite (PDF)
CAD 2D (DXF)
CAD (DWG)