LORO-X COMPOUND PIPE WITH HEATING COIL, STANDARD TYPE

LORO multilayer pipe with trace heating

Tekst przetargowy

LORO-X compound pipe consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 1000 mm long, DN70, with self-regulating trace heating with connecting cable 3 x 1.5 mm², cable length ca. 1 m with connecting cable 3 x 1.5 mm², cable length ca. 1 m

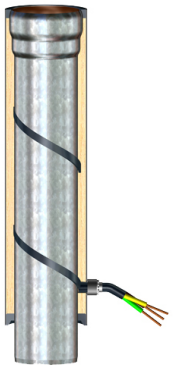

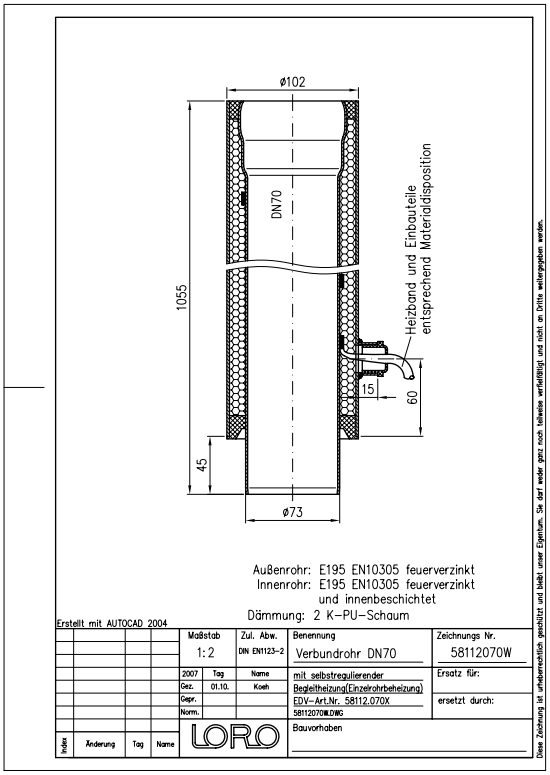

Dane artykułu

Kod EAN	4038088025536
Klasa ETIM	EC010225
Średnica nominalna	DN 70
Długość/stopień nominalny	1000
Wymiary zewnętrzne (WxSxD)	125 x 102 x 1055 mm
Waga	10,20 Kg (STK)
Grupa produktów	3
Numer taryfy celnej	73063012
Materiał / Kolor	Stahl feuerverzinkt, Silber

Wskazówki dotyczące użytkowania

kein Verwendungshinweis notwendig

Pobieranie

Alles online

Rysunek wymiarowy (PDF)
Broszura (PDF)
CAD 2D (DXF)
CAD (DWG)