


LORO-X COMPOUND PIPE WITH HEATING COIL, STANDARD TYPE

LORO multilayer pipe with trace heating

Beskrivelsestekst

LORO-X compound pipe consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 1000 mm long, DN70, with self-regulating trace heating with connecting cable 3 x 1.5 mm², cable length ca. 1 m with connecting cable 3 x 1.5 mm², cable length ca. 1 m

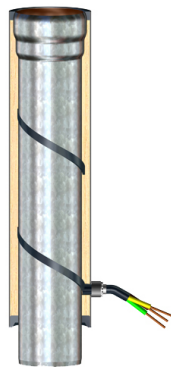


Artikkeldata

EAN-kode	4038088025536
ETIM-klasse	EC010225
Nominell diameter	DN 70
Nominell lengde/grad	1000
Utvendige mål (HxBxL)	125 x 102 x 1055 mm
Vekt	10,20 Kg (STK)
Produktgruppe	3
Tolltariffnummer	73063012
Materiale / Farge	Stahl feuerverzinkt, Silber

Bruksanvisning

kein Verwendungshinweis notwendig

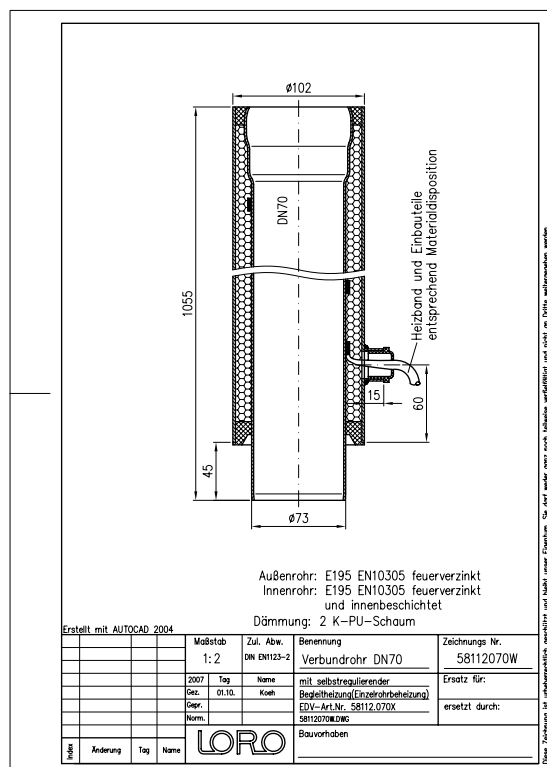

Nedlastinger



Alles online

[Måltægning \(PDF\)](#)

[CAD \(DWG\)](#)

[Brosjyre \(PDF\)](#)

[CAD 2D \(DXF\)](#)