LORO-X COMPOUND PIPE WITH HEATING COIL, STANDARD TYPE

LORO multilayer pipe with trace heating

Texto de licitación

LORO-X compound pipe consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 1000 mm long, DN100, with self-regulating trace heating with connecting cable 3 x 1.5 mm², cable length ca. 1 m

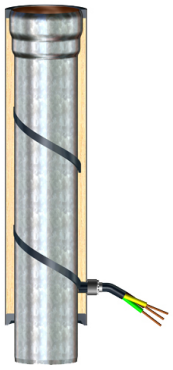

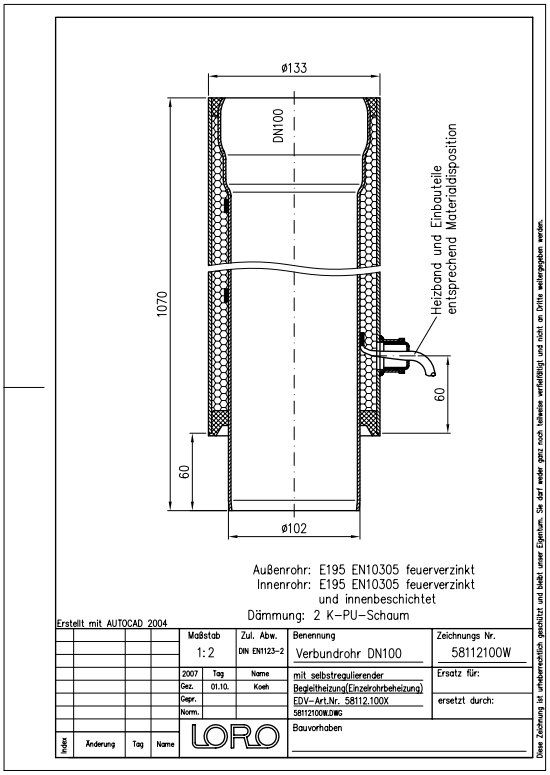

Datos del artículo

Código EAN	**4038088025543**
Clase ETIM	**EC010225**
Diámetro nominal	**DN 100**
Longitud/grado nominal	**1000**
Medidas exteriores (AxAxL)	**156 x 133 x 1070 mm**
Peso	**15,20 Kg (STK)**
Grupo de productos	**3**
Número de arancel aduanero	**73063012**
Material / Color	**Stahl feuerverzinkt, Silber**

Nota de uso

kein Verwendungshinweis notwendig

Descargas

Alles online

Dibujo dimensional (PDF)
Folleto (PDF)
CAD 2D (DXF)
CAD (DWG)