


LORO-X COMPOUND PIPE WITH HEATING COIL, STANDARD TYPE

LORO multilayer pipe with trace heating

Text pentru caietul de sarcini

LORO-X compound pipe consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 1000 mm long, DN125, with self-regulating trace heating with connecting cable 3 x 1.5 mm², cable length ca. 1 m with connecting cable 3 x 1.5 mm², cable length ca. 1 m

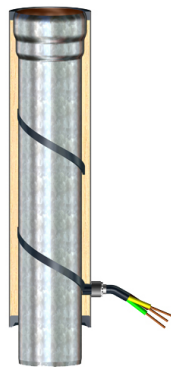


Date articol

Cod EAN	4038088025550
Clasă ETIM	EC010225
Diametru nominal	DN 125
Lungime/grad nominal	1000
Dimensiuni exterioare (îxLxA)	191 x 168 x 1075 mm
Greutate	24,20 Kg (STK)
Grupă de produse	3
Număr tarif vamal	73063018
Material / Culoare	Stahl feuerverzinkt, Silber

Notă de utilizare

kein Verwendungshinweis notwendig

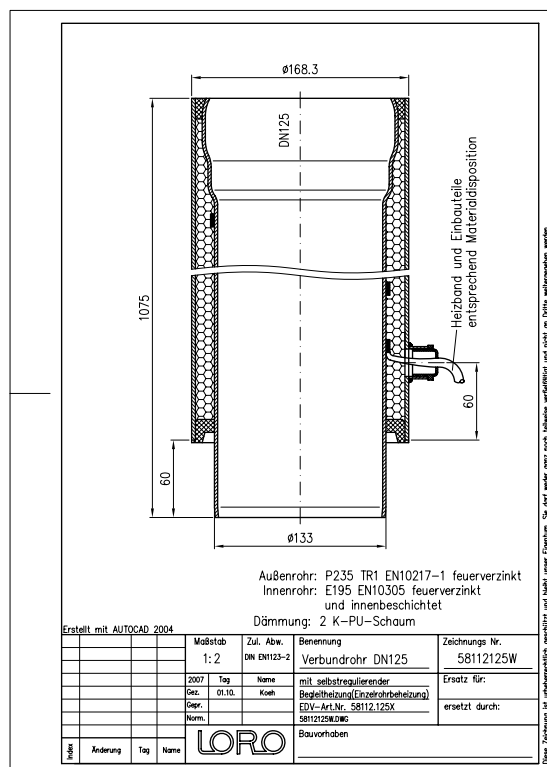

Descărcări



Alles online

[Desen CAD \(PDF\)](#)

[CAD \(DWG\)](#)

[Broșură \(PDF\)](#)

[CAD 2D \(DXF\)](#)