


LORO-X COMPOUND PIPE WITH HEATING COIL, STANDARD TYPE

LORO multilayer pipe with trace heating

Text pre výberové konanie

LORO-X compound pipe consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 1000 mm long, DN125, with self-regulating trace heating with connecting cable 3 x 1.5 mm², cable length ca. 1 m with connecting cable 3 x 1.5 mm², cable length ca. 1 m

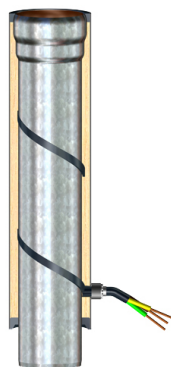


Údaje o artikli

EAN kód	4038088025550
ETIM trieda	EC010225
Menovitý priemer	DN 125
Menovitá dĺžka/stupeň	1000
Vonkajšie rozmery (VxŠxH)	191 x 168 x 1075 mm
Hmotnosť	24,20 Kg (STK)
Skupina produktov	3
Colný sadzobník	73063018
Materiál / Farba	Stahl feuerverzinkt, Silber

Pokyny na použitie

kein Verwendungshinweis notwendig

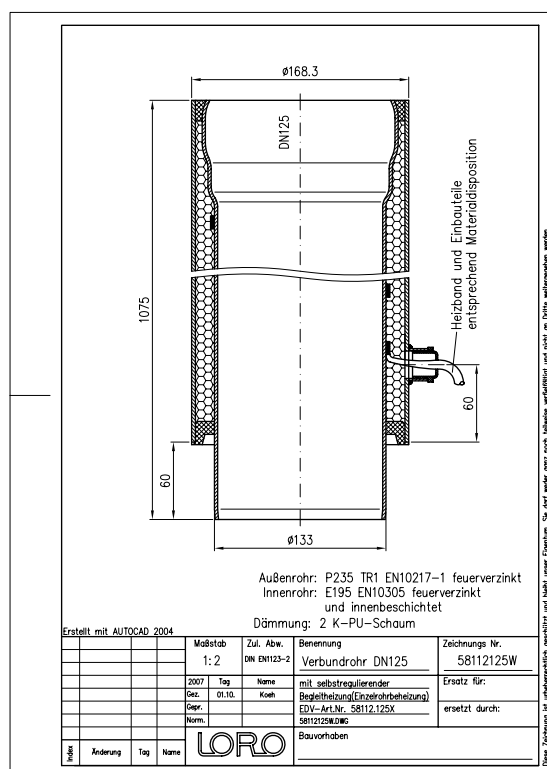

Na stiahnutie



Alles online

[Rozmerový výkres \(PDF\)](#)

[CAD \(DWG\)](#)

[Prospekt \(PDF\)](#)

[CAD 2D \(DXF\)](#)