LORO-X COMPOUND PIPE WITH HEATING COIL, STANDARD TYPE

LORO multilayer pipe with trace heating

Tekst przetargowy

LORO-X compound pipe consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 1000 mm long, DN125, with self-regulating trace heating with connecting cable 3 x 1.5 mm², cable length ca. 1 m with connecting cable 3 x 1.5 mm², cable length ca. 1 m

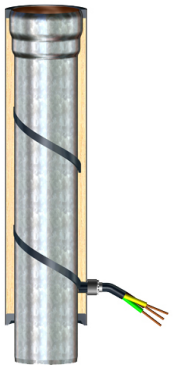

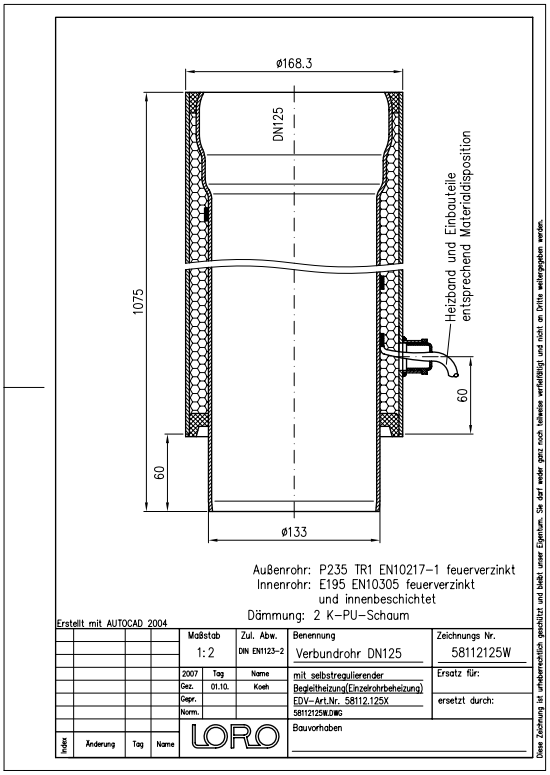

Dane artykułu

Kod EAN	**4038088025550**
Klasa ETIM	**EC010225**
Średnica nominalna	**DN 125**
Długość/stopień nominalny	**1000**
Wymiary zewnętrzne (WxSxD)	**191 x 168 x 1075 mm**
Waga	**24,20 Kg (STK)**
Grupa produktów	**3**
Numer taryfy celnej	**73063018**
Materiał / Kolor	**Stahl feuerverzinkt, Silber**

Wskazówki dotyczące użytkowania

kein Verwendungshinweis notwendig

Pobieranie

Alles online

Rysunek wymiarowy (PDF)
Broszura (PDF)
CAD 2D (DXF)
CAD (DWG)