


## LORO-X COMPOUND PIPE WITH HEATING COIL, STANDARD TYPE

LORO multilayer pipe with trace heating

### Tarjouspyyntöteksti

LORO-X compound pipe consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 1000 mm long, DN150, with self-regulating trace heating with connecting cable 3 x 1.5 mm<sup>2</sup>, cable length ca. 1 m

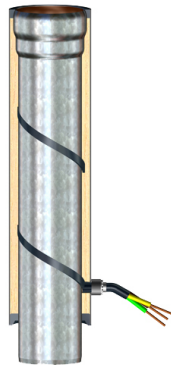


### Tuotetiedot

|                      |                             |
|----------------------|-----------------------------|
| EAN-koodi            | 4038088025567               |
| ETIM-luokka          | EC010225                    |
| Nimellishalkaisija   | DN 150                      |
| Nimellispituus/-aste | 1000                        |
| Ulkomitat (KxLxS)    | 241 x 219 x 1080 mm         |
| Paino                | 30,70 Kg (STK)              |
| Tuoteryhmä           | 3                           |
| Tullitariffin numero | 73063018                    |
| Materiaali / Väri    | Stahl feuerverzinkt, Silber |

### Käyttöohje

kein Verwendungshinweis notwendig

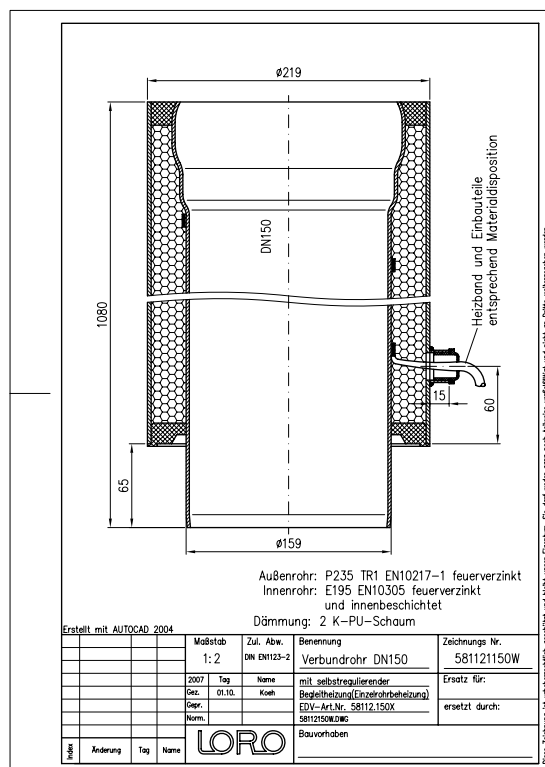

### Lataukset



Alles online

[Mittapiirustus \(PDF\)](#)

[CAD \(DWG\)](#)

[Esite \(PDF\)](#)

[CAD 2D \(DXF\)](#)