LORO-X COMPOUND PIPE WITH HEATING COIL, STANDARD TYPE

LORO multilayer pipe with trace heating

Text pre výberové konanie

LORO-X compound pipe consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 1000 mm long, DN150, with self-regulating trace heating with connecting cable 3 x 1.5 mm², cable length ca. 1 m

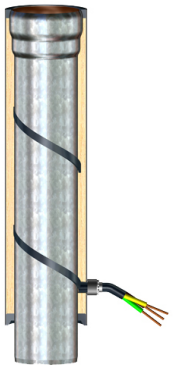

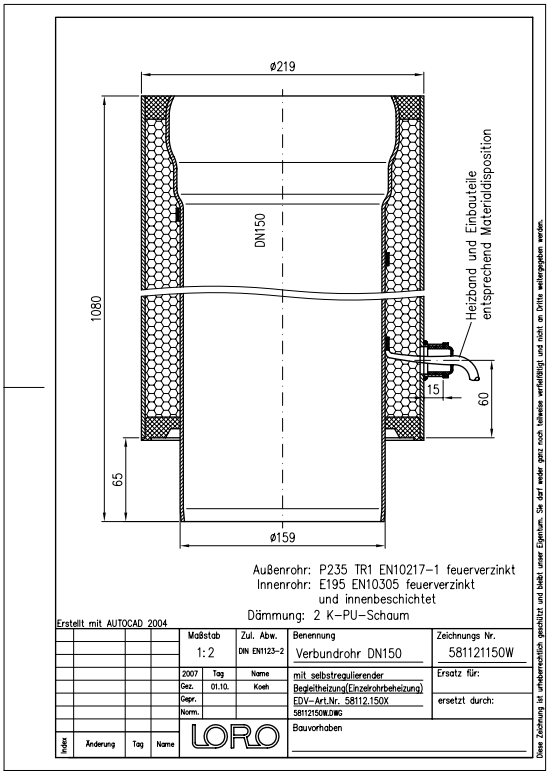

Údaje o artikli

EAN kód	**4038088025567**
ETIM trieda	**EC010225**
Menovitý priemer	**DN 150**
Menovitá dĺžka/stupeň	**1000**
Vonkajšie rozmery (VxŠxH)	**241 x 219 x 1080 mm**
Hmotnosť	**30,70 Kg (STK)**
Skupina produktov	**3**
Colný sadzobník	**73063018**
Materiál / Farba	**Stahl feuerverzinkt, Silber**

Pokyny na použitie

kein Verwendungshinweis notwendig

Na stiahnutie

Rozmerový výkres (PDF)
Prospekt (PDF)
CAD 2D (DXF)
CAD (DWG)

Alles online