


## LORO-X COMPOUND PIPE WITH HEATING COIL, STANDARD TYPE

LORO multilayer pipe with trace heating

### Texto para caderno de encargos

LORO-X compound pipe consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 1000 mm long, DN150, with self-regulating trace heating with connecting cable 3 x 1.5 mm², cable length ca. 1 m

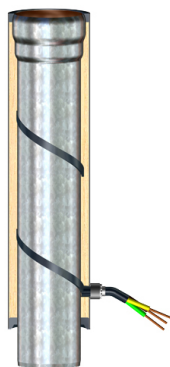


### Dados do artigo

|                            |                             |
|----------------------------|-----------------------------|
| Código EAN                 | 4038088025567               |
| Classe ETIM                | EC010225                    |
| Diâmetro nominal           | DN 150                      |
| Comprimento/grau nominal   | 1000                        |
| Medidas exteriores (AxLxP) | 241 x 219 x 1080 mm         |
| Peso                       | 30,70 Kg (STK)              |
| Grupo de produtos          | 3                           |
| Número de pauta aduaneira  | 73063018                    |
| Material / Cor             | Stahl feuerverzinkt, Silber |

### Nota de utilização

kein Verwendungshinweis notwendig

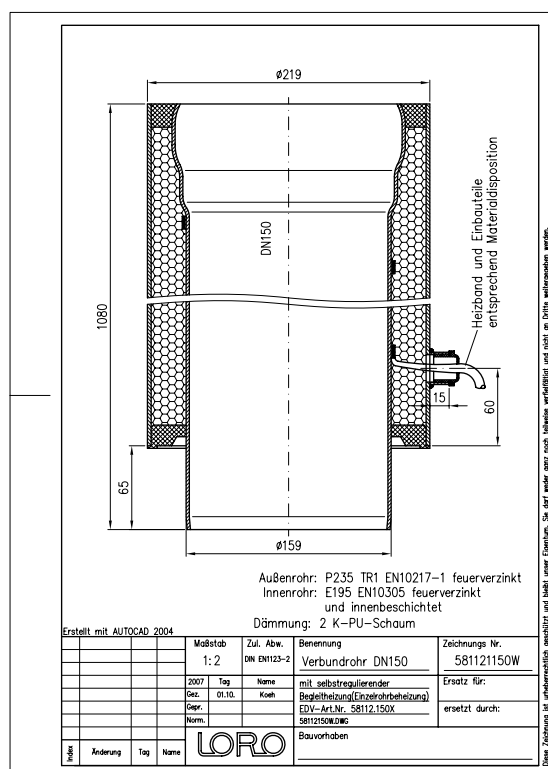

### Transferências



Alles online

[Desenho cotado \(PDF\)](#)

[CAD \(DWG\)](#)

[Brochura \(PDF\)](#)

[CAD 2D \(DXF\)](#)