


LORO-X COMPOUND PIPE WITH HEATING COIL, STANDARD TYPE

LORO multilayer pipe with trace heating

Tekst przetargowy

LORO-X compound pipe consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 1000 mm long, DN150, with self-regulating trace heating with connecting cable 3 x 1.5 mm², cable length ca. 1 m

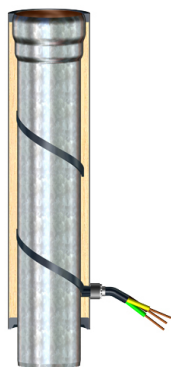


Dane artykułu

Kod EAN	4038088025567
Klasa ETIM	EC010225
Średnica nominalna	DN 150
Długość/stopień nominalny	1000
Wymiary zewnętrzne (WxSxD)	241 x 219 x 1080 mm
Waga	30,70 Kg (STK)
Grupa produktów	3
Numer taryfy celnej	73063018
Materiał / Kolor	Stahl feuerverzinkt, Silber

Wskazówki dotyczące użytkowania

kein Verwendungshinweis notwendig

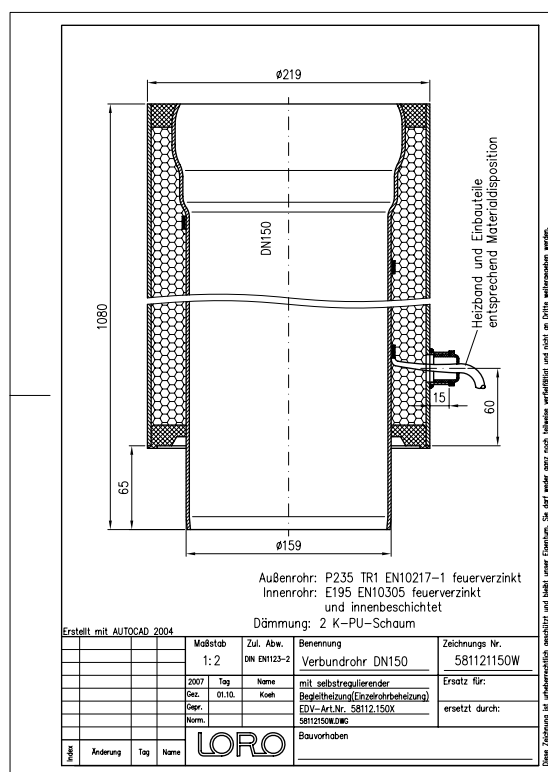

Pobieranie



Alles online

[Rysunek wymiarowy \(PDF\)](#)

[CAD \(DWG\)](#)

[Broszura \(PDF\)](#)

[CAD 2D \(DXF\)](#)