

## LORO-X SILENT COMPOSITE PIPE WITH 1 SOCKET 3000 MM DN 70

LORO multilayer pipe SILENT 3000 mm DN 70

### Opis

LORO-X compound pipe, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 3000 mm long, DN70




### Dane artykułu

|                            |                             |
|----------------------------|-----------------------------|
| Kod EAN                    | 4038088025581               |
| Klasa ETIM                 | EC010225                    |
| Średnica nominalna         | DN 70                       |
| Długość/stopień nominalny  | 3000                        |
| Wymiary zewnętrzne (WxSxD) | 102 x 102 x 3065 mm         |
| Waga                       | 30,50 Kg (STK)              |
| Grupa produktów            | 3                           |
| Numer taryfy celnej        | 73063012                    |
| Materiał / Kolor           | Stahl feuerverzinkt, Silber |

### Wskazówki dotyczące użytkowania

Silent für erhöhte Schallschutzanforderungen  
Doppelwandiges Abflussrohr, DN 40 - DN 150  
bestehend aus: Innenrohr mit Schallschutzfolie, PU-Dämmschicht, Baustoffklasse B2, FCKW-frei, Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

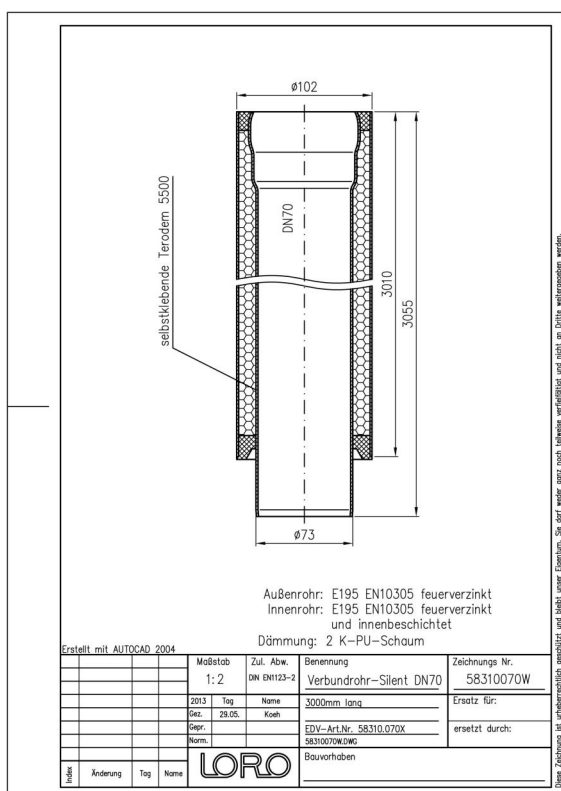

### Pobieranie



Alles online

[Instrukcja montażu \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Rysunek wymiarowy \(PDF\)](#)

[CAD \(DWG\)](#)

[Broszura \(PDF\)](#)