


LORO-X SILENT COMPOSITE PIPE WITH 1 SOCKET 3000 MM DN 125

LORO multilayer pipe SILENT 3000 mm DN 125

Description

LORO-X compound pipe, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 3000 mm long, DN125

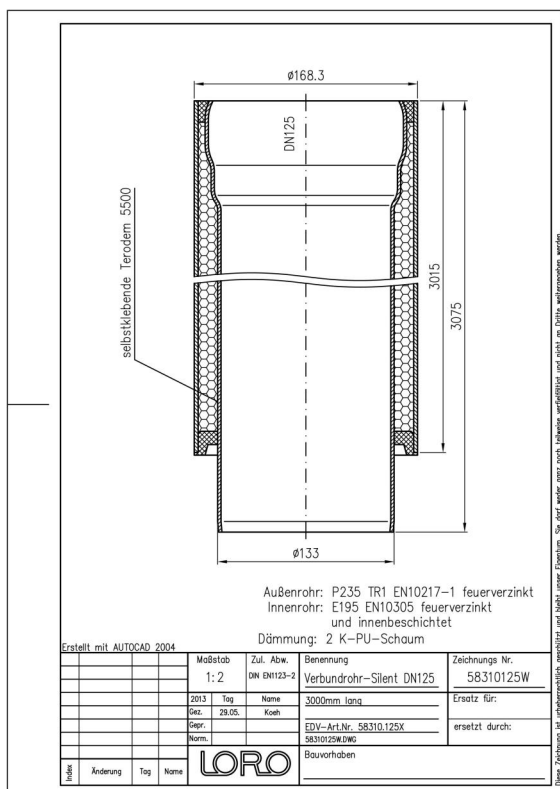

Article information

EAN Code	4038088025604
ETIM Class	EC010225
Nominal diameter	DN 125
Nominal length/degree	3000
Outside measurements (HxWxL)	168 x 168 x 3075 mm
Weight	71,30 Kg (STK)
Product group	3
Customs tariff number	73063018
Material / Color	Stahl feuerverzinkt, Silber

Usage note

Silent für erhöhte Schallschutzanforderungen
Doppelwandiges Abflussrohr, DN 40 - DN 150
bestehend aus:Innenrohr mit Schallschutzfolie,PU-
Dämmschicht, Baustoffklasse B2, FCKW-
frei,Außenrohr (Innenrohr- und Außenrohr aus LORO-X
Stahlabflussrohr) Achtung: Sonderanfertigung - keine
Lagerware.

Downloads



Alles online

[Installation \(PDF\)](#)

CAD 2D (DXF)

[CAD drawing \(PDF\)](#)

CAD (DWG)

[Brochure \(PDF\)](#)