

## LORO-X SILENT COMPOSITE PIPE WITH 1 SOCKET 3000 MM DN 125

## LORO multilayer pipe SILENT 3000 mm DN 125

### Description

LORO-X compound pipe, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 3000 mm long, DN125




## Données de l'article

|                                |                             |
|--------------------------------|-----------------------------|
| Code EAN                       | 4038088025604               |
| Classe ETIM                    | EC010225                    |
| Diamètre nominal               | DN 125                      |
| Longueur/degré nominal         | 3000                        |
| Dimensions extérieures (HxLxP) | 168 x 168 x 3075 mm         |
| Poids                          | 71,30 Kg (STK)              |
| Groupe de produits             | 3                           |
| Numéro tarifaire douanier      | 73063018                    |
| Matériau / Couleur             | Stahl feuerverzinkt, Silber |

## Note d'utilisation

Silent für erhöhte Schallschutzanforderungen  
Doppelwandiges Abflussrohr, DN 40 - DN 150  
bestehend aus:Innenrohr mit Schallschutzfolie,PU-  
Dämmschicht, Baustoffklasse B2, FCKW-  
frei,Außenrohr (Innenrohr- und Außenrohr aus LORO-X  
Stahlabflussrohr) Achtung: Sonderanfertigung - keine  
Lagerware.

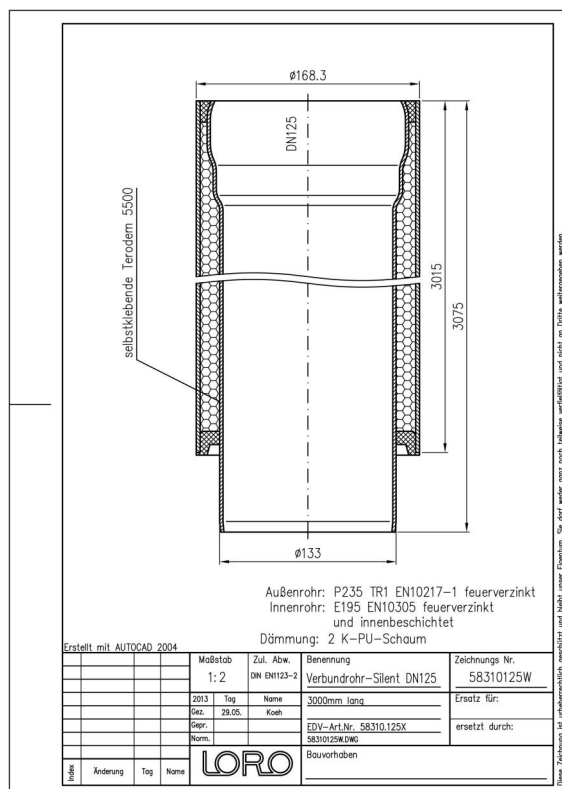

## Téléchargements



Alles online

[Notice d'installation \(PDF\)](#)

CAD 2D (DXF)

[Dessin dimensionnel \(PDF\)](#)

CAD (DWG)

[Brochure \(PDF\)](#)