


LORO-VERBUNDROHR SILENT 250 MM DN 32

LORO-Composite Pipe SILENT 250 mm DN 32

Beskrivelsestekst

LORO-X compound pipe, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 250 mm long, DN32

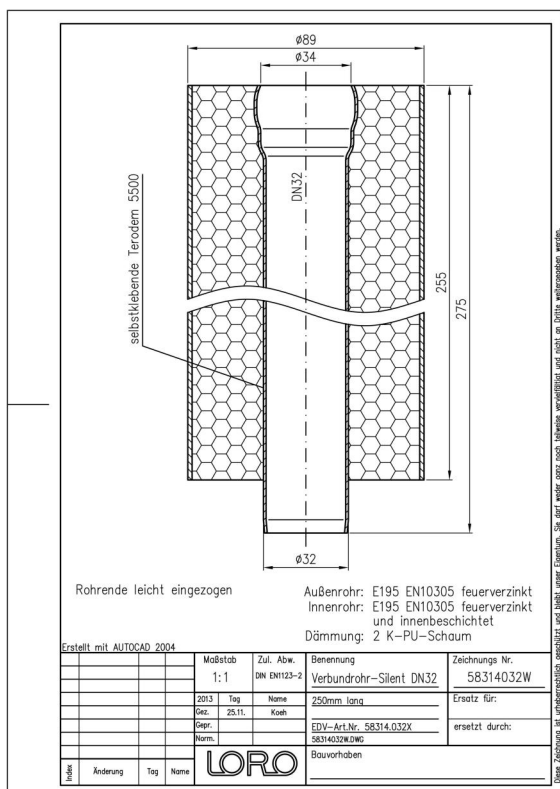

Artikkeldata

EAN-kode	4038088094457
ETIM-klasse	EC010225
Nominell diameter	DN 32
Nominell lengde/grad	250
Utvendige mål (HxBxL)	89 x 89 x 275 mm
Vekt	0,10 Kg (STK)
Produktgruppe	3
Tolltariffnummer	73063012
Materiale / Farge	Stahl feuerverzinkt, Silber

Bruksanvisning

Silent für erhöhte Schallschutzanforderungen Doppelwandiges Abflussrohr, DN 40 - DN 150 bestehend aus:Innenrohr mit Schallschutzfolie,PU-Dämmschicht, Baustoffklasse B2, FCKW-frei,Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

Nedlastinger



Alles online

[Monteringsanvisning \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[Måltgning \(PDF\)](#)
[CAD \(DWG\)](#)
[Brosjyre \(PDF\)](#)