


## LORO-X SILENT COMPOSITE PIPE WITH 1 SOCKET 250 MM DN 150

LORO multilayer pipe SILENT 250 mm DN 150

### Popis

LORO-X compound pipe, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 250 mm long, DN150

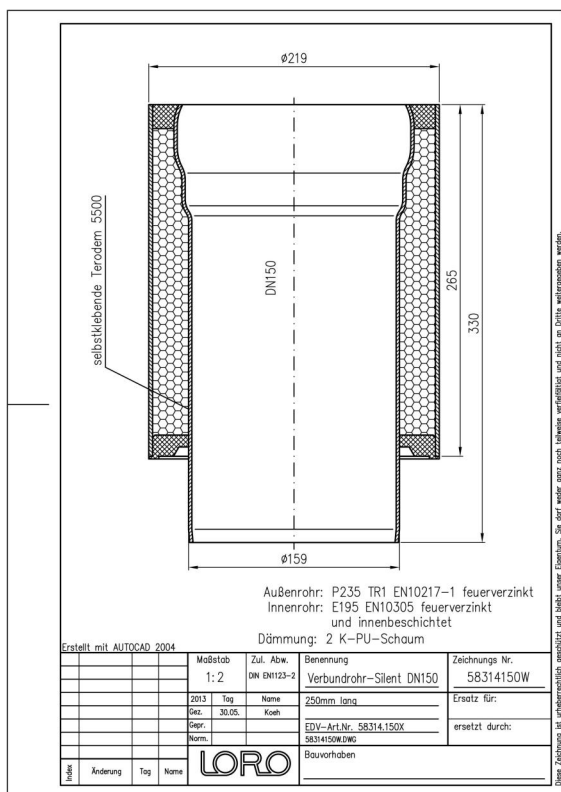

### Údaje o artiklu

|                        |                             |
|------------------------|-----------------------------|
| EAN kód                | 4038088025819               |
| ETIM třída             | EC010225                    |
| Jmenovitý průměr       | DN 150                      |
| Jmenovitá délka/stupeň | 250                         |
| Vnější rozměry (VxŠxD) | 219 x 219 x 330 mm          |
| Hmotnost               | 8,90 Kg (STK)               |
| Skupina produktů       | 3                           |
| Celní sazebník         | 73063018                    |
| Materiál / Barva       | Stahl feuerverzinkt, Silber |

### Pokyny k použití

Silent für erhöhte Schallschutzanforderungen  
Doppelwandiges Abflussrohr, DN 40 - DN 150  
bestehend aus: Innenrohr mit Schallschutzfolie, PU-Dämmschicht, Baustoffklasse B2, FCKW-frei, Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

### Ke stažení



Alles online

[Návod k instalaci \(PDF\)](#)  
[CAD 2D \(DXF\)](#)

[Výkres rozměrů \(PDF\)](#)  
[CAD \(DWG\)](#)

[Prospekt \(PDF\)](#)