LORO-VERBUNDROHR SILENT 1500 MM DN 40

LORO multilayer pipe SILENT 1500 mm DN 40

Beskrivningstext

LORO-X compound pipe, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 1500 mm long, DN40

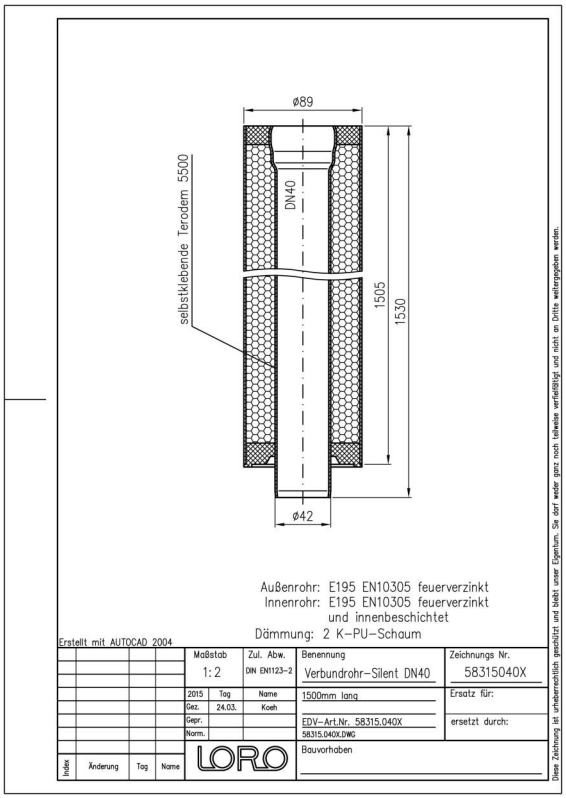

Artikeldata

EAN-kod	**4038088089941**
ETIM-klass	**EC010225**
Nominell diameter	**DN 40**
Nominell längd/grad	**1500**
Yttermått (HxBxL)	**89 x 89 x 1530 mm**
Vikt	**8,60 Kg (STK)**
Produktgrupp	**3**
Tullnummer	**73063012**
Material / Färg	**Stahl feuerverzinkt, Silber**

Användningsanvisning

Silent für erhöhte Schallschutzanforderungen Doppelwandiges Abflussrohr, DN 40 - DN 150 bestehend aus:Innenrohr mit Schallschutzfolie,PU-Dämmschicht, Baustoffklasse B2, FCKW-frei,Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

Nedladdningar

Alles online

Monteringsanvisning (PDF)
CAD 2D (DXF)
Måttritning (PDF)
CAD (DWG)
Broschyr (PDF)