

## LORO-X SILENT COMPOSITE PIPE WITH 1 SOCKET 1500 MM DN 50

LORO multilayer pipe SILENT 1500 mm DN 50

### Description

LORO-X compound pipe, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 1500 mm long, DN50




### Article information

|                              |                             |
|------------------------------|-----------------------------|
| EAN Code                     | 4038088025826               |
| ETIM Class                   | EC010225                    |
| Nominal diameter             | DN 50                       |
| Nominal length/degree        | 1500                        |
| Outside measurements (HxWxL) | 89 x 89 x 1538 mm           |
| Weight                       | 11,00 Kg (STK)              |
| Product group                | 3                           |
| Customs tariff number        | 73063012                    |
| Material / Color             | Stahl feuerverzinkt, Silber |

### Usage note

Silent für erhöhte Schallschutzanforderungen  
Doppelwandiges Abflussrohr, DN 40 - DN 150  
bestehend aus: Innenrohr mit Schallschutzfolie, PU-Dämmschicht, Baustoffklasse B2, FCKW-frei, Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

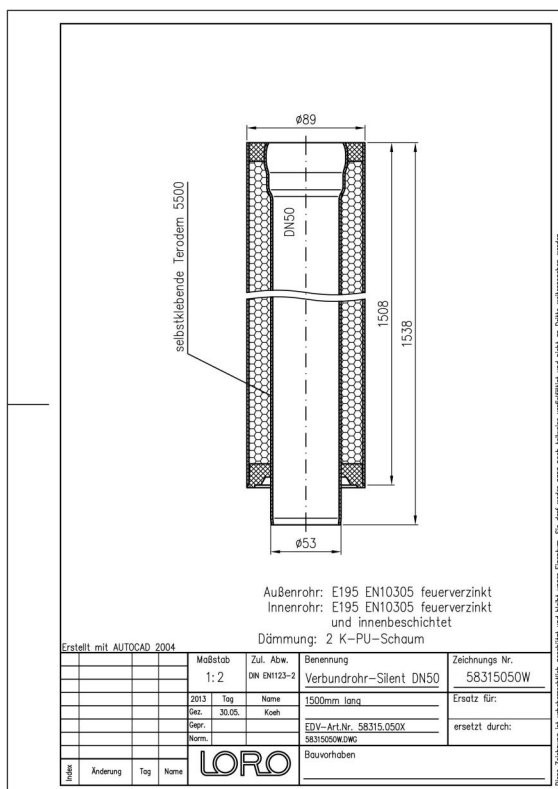

### Downloads



Alles online

[Installation \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[CAD drawing \(PDF\)](#)

[CAD \(DWG\)](#)

[Brochure \(PDF\)](#)