


## LORO-X SILENT COMPOSITE PIPE WITH 1 SOCKET 1500 MM DN 50

LORO multilayer pipe SILENT 1500 mm DN 50

### Popis

LORO-X compound pipe, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 1500 mm long, DN50

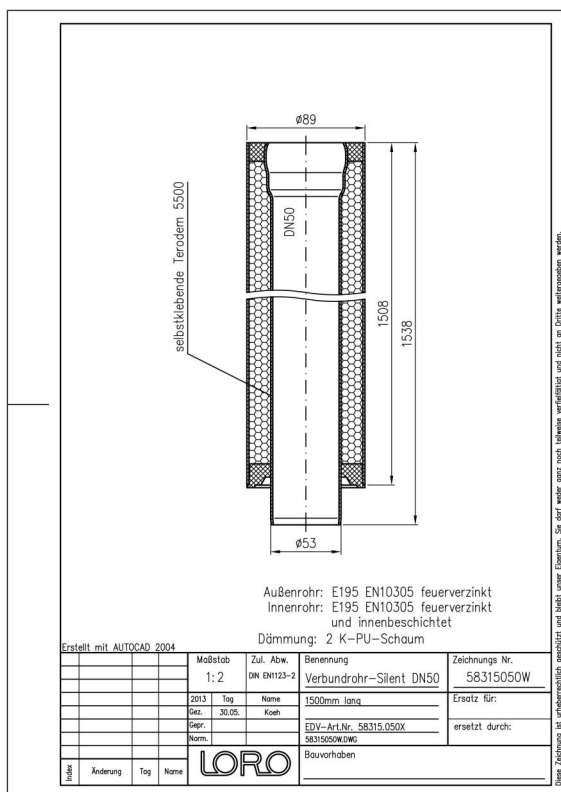

### Údaje o artikli

|                           |                             |
|---------------------------|-----------------------------|
| EAN kód                   | 4038088025826               |
| ETIM trieda               | EC010225                    |
| Menovitý priemer          | DN 50                       |
| Menovitá dĺžka/stupeň     | 1500                        |
| Vonkajšie rozmery (VxŠxH) | 89 x 89 x 1538 mm           |
| Hmotnosť                  | 11,00 Kg (STK)              |
| Skupina produktov         | 3                           |
| Colný sadzobník           | 73063012                    |
| Materiál / Farba          | Stahl feuerverzinkt, Silber |

### Pokyny na použitie

Silent für erhöhte Schallschutzanforderungen Doppelwandiges Abflussrohr, DN 40 - DN 150 bestehend aus: Innenrohr mit Schallschutzfolie, PU-Dämmschicht, Baustoffklasse B2, FCKW-frei, Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

### Na stiahnutie



Alles online

[Návod na montáž \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Rozmerový výkres \(PDF\)](#)

[CAD \(DWG\)](#)

[Prospekt \(PDF\)](#)