

LORO-X SILENT COMPOSITE PIPE WITH 1 SOCKET 1500 MM DN 50

LORO multilayer pipe SILENT 1500 mm DN 50

Beschrijving

LORO-X compound pipe, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 1500 mm long, DN50



Artikelgegevens

EAN-code **4038088025826**

ETIM Klasse **EC010225**

Nominale diameter **DN 50**

Nominale
lengte/graad **1500**

Buitenaftmetingen
(HxBxL) **89 x 89 x 1538 mm**

Gewicht **11,00 Kg (STK)**

Productgroep **3**


Douanetariefnumme **73063012**

r

Materiaal / Kleur **Stahl feuerverzinkt, Silber**

Gebruiksaanwijzing

Silent für erhöhte Schallschutzanforderungen Doppelwandiges Abflussrohr, DN 40 - DN 150 bestehend aus: Innenrohr mit Schallschutzfolie, PU-Dämmschicht, Baustoffklasse B2, FCKW-frei, Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

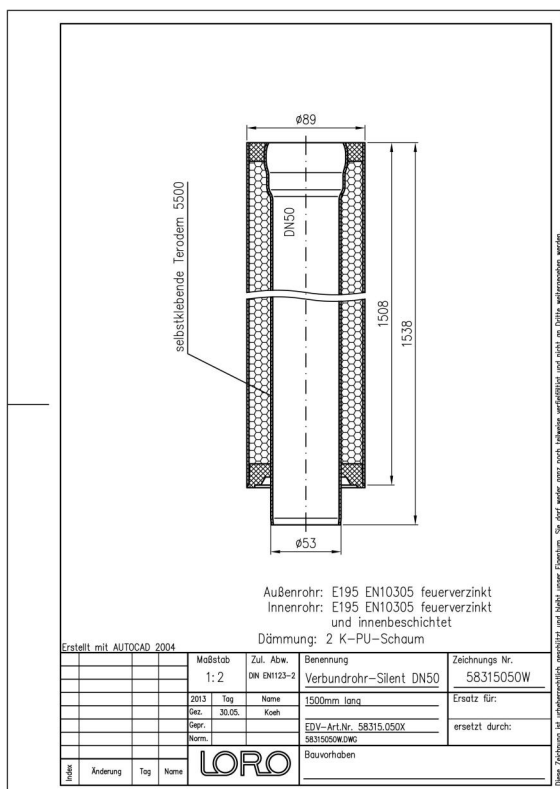

Downloads



Alles online

[Installatiehandleiding \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Maattekening \(PDF\)](#)

[CAD \(DWG\)](#)

[Brochure \(PDF\)](#)