

## LORO-X SILENT COMPOSITE PIPE WITH 1 SOCKET 1500 MM DN 100

### LORO multilayer pipe SILENT 1500 mm DN 100

#### Kuvaus

LORO-X compound pipe, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 1500 mm long, DN100




#### Tuotetiedot

|                      |                             |
|----------------------|-----------------------------|
| EAN-koodi            | 4038088025840               |
| ETIM-luokka          | EC010225                    |
| Nimellishalkaisija   | DN 100                      |
| Nimellispituus/-aste | 1500                        |
| Ulkomitat (KxLxS)    | 133 x 133 x 1570 mm         |
| Paino                | 24,90 Kg (STK)              |
| Tuoteryhmä           | 3                           |
| Tullitariffin numero | 73063012                    |
| Materiaali / Väri    | Stahl feuerverzinkt, Silber |

#### Käyttöohje

Silent für erhöhte Schallschutzanforderungen  
Doppelwandiges Abflussrohr, DN 40 - DN 150  
bestehend aus: Innenrohr mit Schallschutzfolie, PU-Dämmschicht, Baustoffklasse B2, FCKW-frei, Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

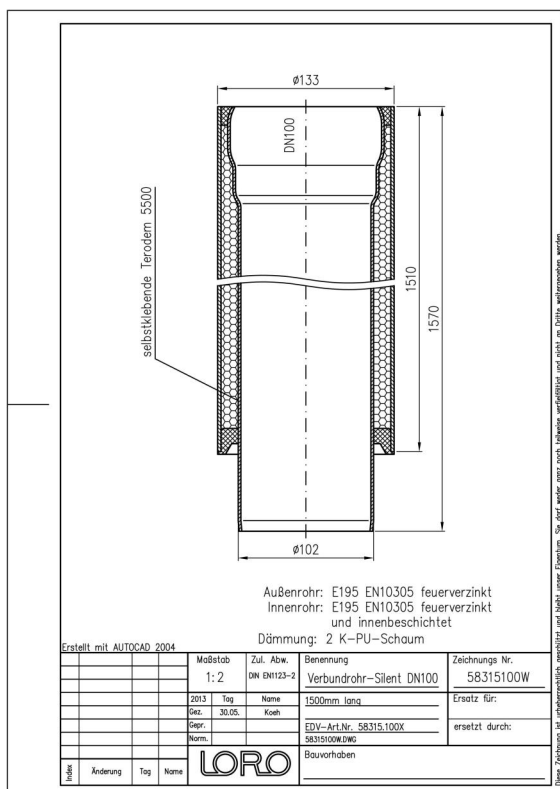

#### Lataukset



Alles online

[Asennusohje \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[Mittapiirustus \(PDF\)](#)
[CAD \(DWG\)](#)
[Esite \(PDF\)](#)