

## LORO-X SILENT COMPOSITE PIPE WITH 1 SOCKET 1500 MM DN 125

## LORO multilayer pipe SILENT 1500 mm DN 125

## Opis

LORO-X compound pipe, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 1500 mm long, DN125




## Podatki o izdelku

|                           |                             |
|---------------------------|-----------------------------|
| EAN koda                  | 4038088025857               |
| ETIM razred               | EC010225                    |
| Nazivni premer            | DN 125                      |
| Nazivna dolžina/stopinja  | 1500                        |
| Zunanje mere (VxŠxD)      | 168 x 168 x 1575 mm         |
| Teža                      | 39,10 Kg (STK)              |
| Skupina izdelkov          | 3                           |
| Carinska tarifna številka | 73063018                    |
| Material / Barva          | Stahl feuerverzinkt, Silber |

## Opomba za uporabo

Silent für erhöhte Schallschutzanforderungen  
Doppelwandiges Abflussrohr, DN 40 - DN 150  
bestehend aus:Innenrohr mit Schallschutzfolie,PU-  
Dämmschicht, Baustoffklasse B2, FCKW-  
frei,Außenrohr (Innenrohr- und Außenrohr aus LORO-X  
Stahlabflussrohr) Achtung: Sonderanfertigung - keine  
Lagerware.

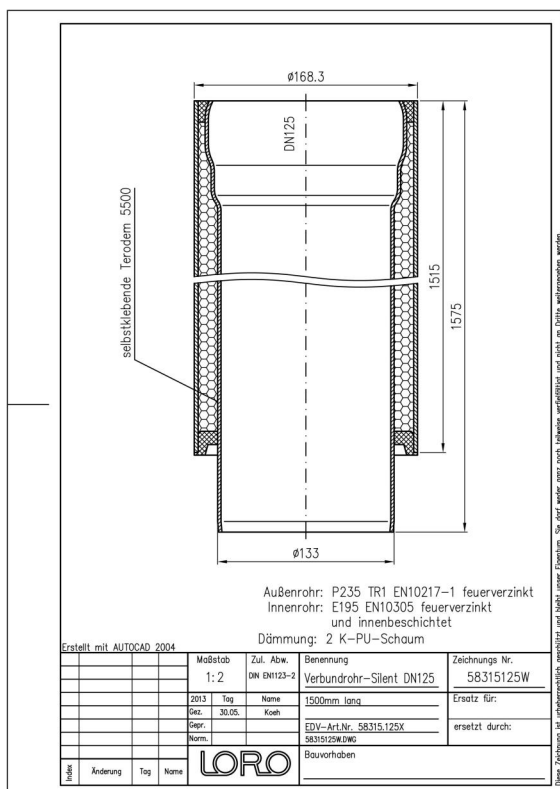

## Prenosi



Alles online

[Navodila za vgradnjo \(PDF\)](#)

CAD 2D (DXF)

[Merska risba \(PDF\)](#)

CAD (DWG)

[Prospekt \(PDF\)](#)