

## LORO-X SILENT COMPOSITE PIPE WITH 1 SOCKET 2500 MM DN 70

## LORO-Composite Pipe SILENT 2500 mm DN 70

### Descrição

LORO-X compound pipe, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 2500 mm long, DN70




## Dados do artigo

|                            |                             |
|----------------------------|-----------------------------|
| Código EAN                 | 4038088025888               |
| Classe ETIM                | EC010225                    |
| Diâmetro nominal           | DN 70                       |
| Comprimento/grau nominal   | 2500                        |
| Medidas exteriores (AxLxP) | 102 x 102 x 2555 mm         |
| Peso                       | 25,40 Kg (STK)              |
| Grupo de produtos          | 3                           |
| Número de pauta aduaneira  | 73063012                    |
| Material / Cor             | Stahl feuerverzinkt, Silber |

## Nota de utilização

Silent für erhöhte Schallschutzanforderungen  
Doppelwandiges Abflussrohr, DN 40 - DN 150  
bestehend aus:Innenrohr mit Schallschutzfolie,PU-  
Dämmschicht, Baustoffklasse B2, FCKW-  
frei,Außenrohr (Innenrohr- und Außenrohr aus LORO-X  
Stahlabflussrohr) Achtung: Sonderanfertigung - keine  
Lagerware.

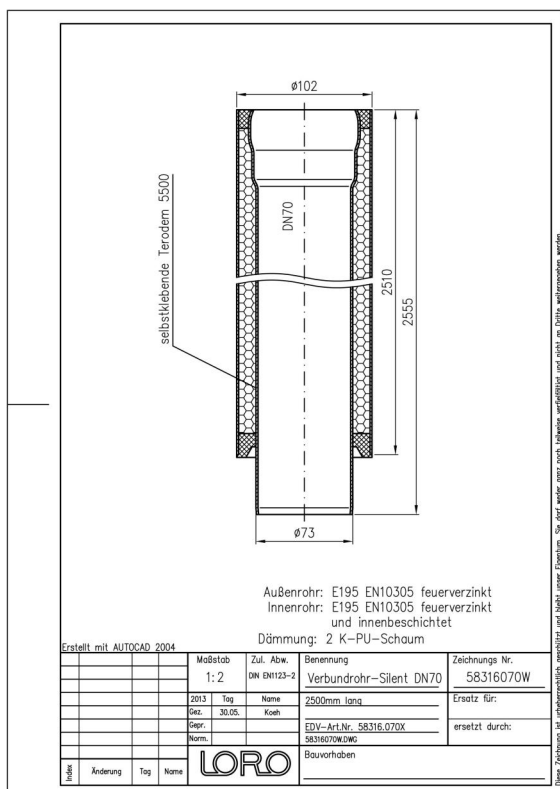

## Transferências



Alles online

[Instruções de instalação \(PDF\)](#)

CAD 2D (DXF)

[Desenho cotado \(PDF\)](#)

CAD (DWG)

[Brochura \(PDF\)](#)