

## LORO-X SILENT COMPOSITE PIPE WITH 1 SOCKET 2500 MM DN 100

## LORO-Composite Pipe SILENT 2500 mm DN 100

### Descripción

LORO-X compound pipe, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 2500 mm long, DN100




## Datos del artículo

|                            |                             |
|----------------------------|-----------------------------|
| Código EAN                 | 4038088025895               |
| Clase ETIM                 | EC010225                    |
| Diámetro nominal           | DN 100                      |
| Longitud/grado nominal     | 2500                        |
| Medidas exteriores (AxAxL) | 133 x 133 x 2570 mm         |
| Peso                       | 41,00 Kg (STK)              |
| Grupo de productos         | 3                           |
| Número de arancel aduanero | 73063012                    |
| Material / Color           | Stahl feuerverzinkt, Silber |

## Nota de uso

Silent für erhöhte Schallschutzanforderungen  
Doppelwandiges Abflussrohr, DN 40 - DN 150  
bestehend aus:Innenrohr mit Schallschutzfolie,PU-  
Dämmschicht, Baustoffklasse B2, FCKW-  
frei,Außenrohr (Innenrohr- und Außenrohr aus LORO-X  
Stahlabflussrohr) Achtung: Sonderanfertigung - keine  
Lagerware.

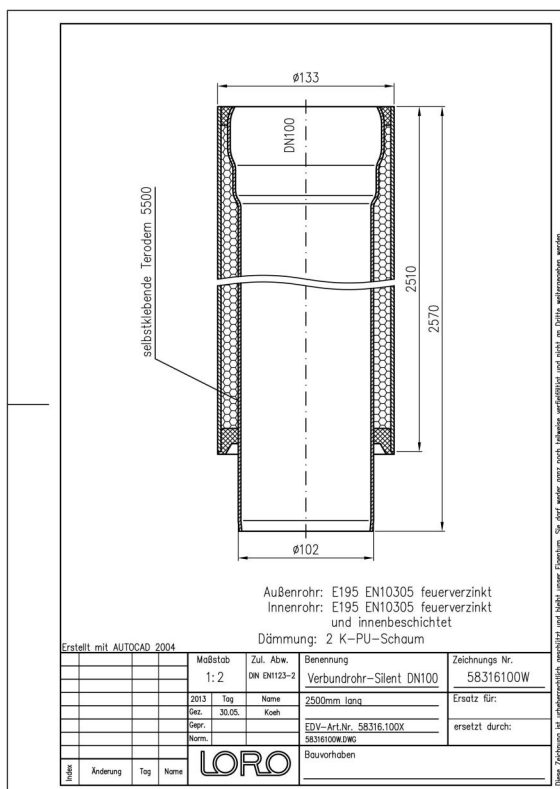

## Descargas



Alles online

[Instrucciones de instalación \(PDF\)](#)  
[CAD 2D \(DXF\)](#)

[Dibujo dimensional \(PDF\)](#)  
[CAD \(DWG\)](#)

[Folleto \(PDF\)](#)