

LORO-X SILENT COMPOSITE PIPE WITH 1 SOCKET 2500 MM DN 100

LORO-Composite Pipe SILENT 2500 mm DN 100

Description

LORO-X compound pipe, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 2500 mm long, DN100




Données de l'article

Code EAN	4038088025895
Classe ETIM	EC010225
Diamètre nominal	DN 100
Longueur/degré nominal	2500
Dimensions extérieures (HxLxP)	133 x 133 x 2570 mm
Poids	41,00 Kg (STK)
Groupe de produits	3
Numéro tarifaire douanier	73063012
Matériau / Couleur	Stahl feuerverzinkt, Silber

Note d'utilisation

Silent für erhöhte Schallschutzanforderungen
Doppelwandiges Abflussrohr, DN 40 - DN 150
bestehend aus:Innenrohr mit Schallschutzfolie,PU-
Dämmschicht, Baustoffklasse B2, FCKW-
frei,Außenrohr (Innenrohr- und Außenrohr aus LORO-X
Stahlabflussrohr) Achtung: Sonderanfertigung - keine
Lagerware.

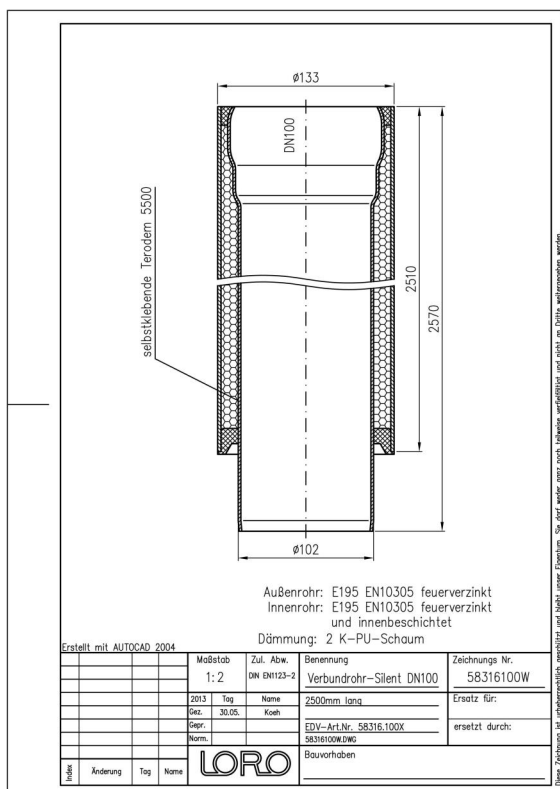

Téléchargements



Alles online

[Notice d'installation \(PDF\)](#)

CAD 2D (DXF)

[Dessin dimensionnel \(PDF\)](#)

CAD (DWG)

[Brochure \(PDF\)](#)