LORO-X SILENT COMPOSITE PIPE WITH 1 SOCKET2500 MM DN 125

LORO multilayer pipe SILENT 2500 mm DN 125

Kuvaus

LORO-X compound pipe, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 2500 mm long, DN125

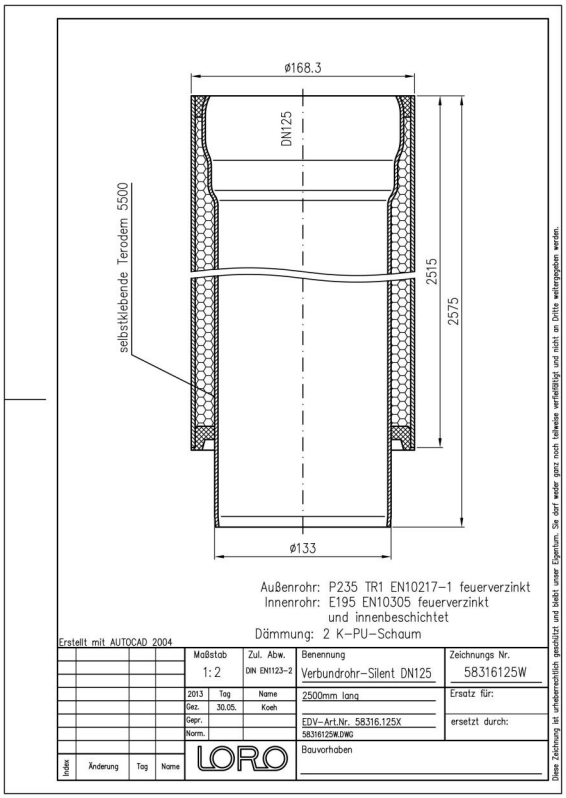

Tuotetiedot

EAN-koodi	**4038088025901**
ETIM-luokka	**EC010225**
Nimellishalkaisija	**DN 125**
Nimellispituus/-aste	**2500**
Ulkomitat (KxLxS)	**168 x 168 x 2575 mm**
Paino	**59,30 Kg (STK)**
Tuoteryhmä	**3**
Tullitariffin numero	**73063018**
Materiaali / Väri	**Stahl feuerverzinkt, Silber**

Käyttöohje

Silent für erhöhte Schallschutzanforderungen Doppelwandiges Abflussrohr, DN 40 - DN 150 bestehend aus:Innenrohr mit Schallschutzfolie,PU-Dämmschicht, Baustoffklasse B2, FCKW-frei,Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

Lataukset

Alles online

Asennusohje (PDF)
CAD 2D (DXF)
Mittapiirustus (PDF)
CAD (DWG)
Esite (PDF)