

## LORO-X SILENT COMPOSITE PIPE WITH 1 SOCKET 4000 MM DN 70

LORO multilayer pipe SILENT 4000 mm DN 70

### Beskrivelse

LORO-X compound pipe, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 4000 mm long, DN70




### Artikkeldata

|                       |                             |
|-----------------------|-----------------------------|
| EAN-kode              | 4038088052266               |
| ETIM-klasse           | EC010225                    |
| Nominell diameter     | DN 70                       |
| Nominell lengde/grad  | 4000                        |
| Utvendige mål (HxBxL) | 84 x 84 x 4055 mm           |
| Vekt                  | 40,20 Kg (STK)              |
| Produktgruppe         | 3                           |
| Tolltariffnummer      | 73063012                    |
| Materiale / Farge     | Stahl feuerverzinkt, Silber |

### Bruksanvisning

Silent für erhöhte Schallschutzanforderungen Doppelwandiges Abflussrohr, DN 40 - DN 150 bestehend aus: Innenrohr mit Schallschutzfolie, PU-Dämmschicht, Baustoffklasse B2, FCKW-frei, Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

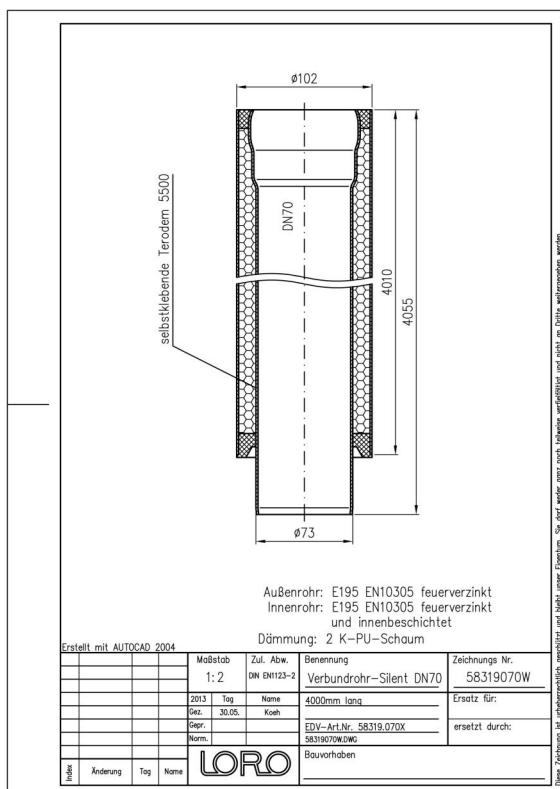

### Nedlasteringer



Alles online

[Monteringsanvisning \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Måltgning \(PDF\)](#)

[CAD \(DWG\)](#)

[Brosjyre \(PDF\)](#)