

## LORO-X SILENT COMPOSITE PIPE WITH 1 SOCKET 4000 MM DN 100

### LORO-Composite Pipe SILENT 4000 mm DN 100

#### Descripción

LORO-X compound pipe, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 4000 mm long, DN100




#### Datos del artículo

|                            |                             |
|----------------------------|-----------------------------|
| Código EAN                 | 4038088052273               |
| Clase ETIM                 | EC010225                    |
| Diámetro nominal           | DN 100                      |
| Longitud/grado nominal     | 4000                        |
| Medidas exteriores (AxAxL) | 133 x 133 x 4070 mm         |
| Peso                       | 64,50 Kg (STK)              |
| Grupo de productos         | 3                           |
| Número de arancel aduanero | 73063012                    |
| Material / Color           | Stahl feuerverzinkt, Silber |

#### Nota de uso

Silent für erhöhte Schallschutzanforderungen Doppelwandiges Abflussrohr, DN 40 - DN 150 bestehend aus: Innenrohr mit Schallschutzfolie, PU-Dämmschicht, Baustoffklasse B2, FCKW-frei, Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

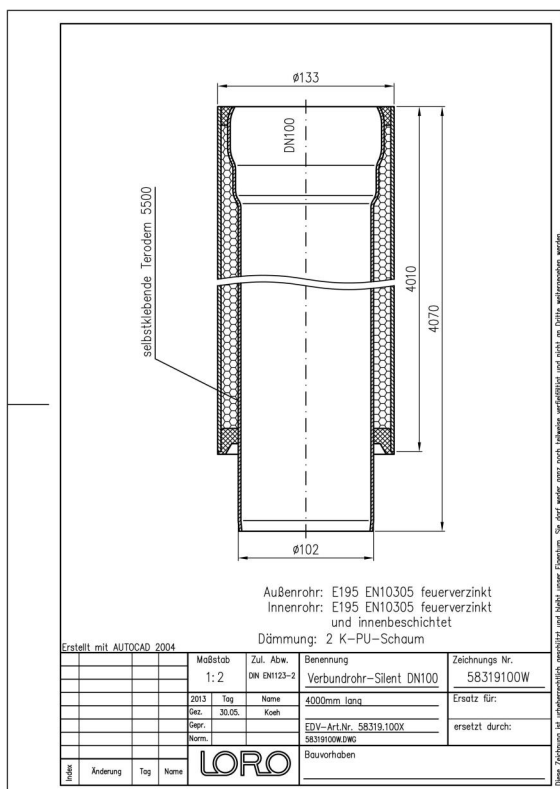

#### Descargas



Alles online

[Instrucciones de instalación \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Dibujo dimensional \(PDF\)](#)

[CAD \(DWG\)](#)

[Folleto \(PDF\)](#)