

## LORO-X SILENT COMPOSITE BRANCH 87 DEGREE DN 50/50

LORO-Composite pipe branch SILENT 87 degrees DN 50/50

### Περιγραφή

LORO-X compound pipe branch, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 87 degrees, DN50




### Στοιχεία προϊόντος

|                               |                             |
|-------------------------------|-----------------------------|
| Κωδικός EAN                   | 4038088026021               |
| Κατηγορία ETIM                | EC003025                    |
| Ονομαστική διάμετρος          | DN 50, DN 50                |
| Ονομαστικό μήκος/μοίρες       | 87                          |
| Εξωτερικές διαστάσεις (ΥxΠxΜ) | 89 x 135 x 168 mm           |
| Βάρος                         | 1,30 Kg (STK)               |
| Ομάδα προϊόντων               | 3                           |
| Δασμολογικός αριθμός          | 73089098                    |
| Υλικό / Χρώμα                 | Stahl feuerverzinkt, Silber |

### Σημείωση χρήσης

Silent für erhöhte Schallschutzanforderungen  
Doppelwandiges Abflussrohr, DN 40 - DN 150  
bestehend aus: Innenrohr mit Schallschutzfolie, PU-Dämmschicht, Baustoffklasse B2, FCKW-frei, Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

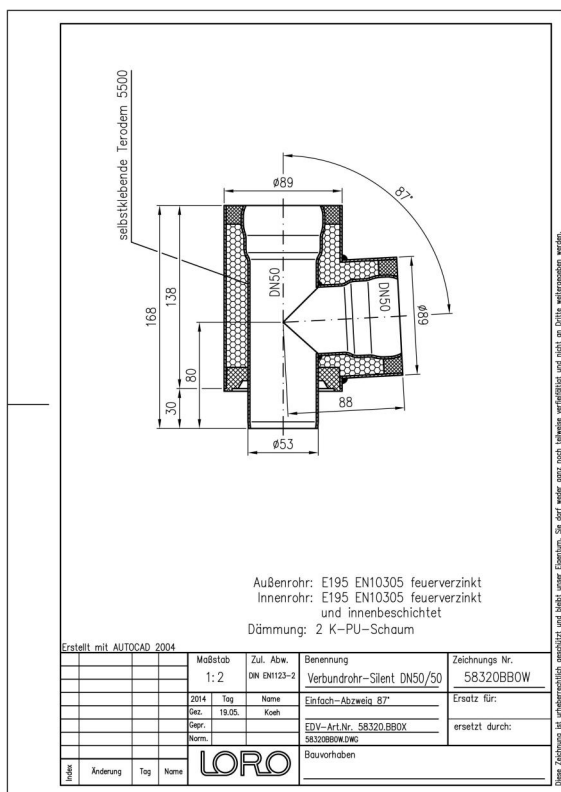

### Λήψεις



Alles online

[Οδηγίες εγκατάστασης \(PDF\)](#)  
[CAD 2D \(DXF\)](#)

[Σχέδιο διαστάσεων \(PDF\)](#)  
[CAD \(DWG\)](#)

[Φυλλάδιο \(PDF\)](#)