


## LORO-X SILENT COMPOSITE BRANCH 87 DEGREE DN 125/125

## LORO-Composite pipe branch SILENT 87 degrees DN 125/125

## Descrizione

LORO-X compound pipe branch, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 87 degrees, DN125

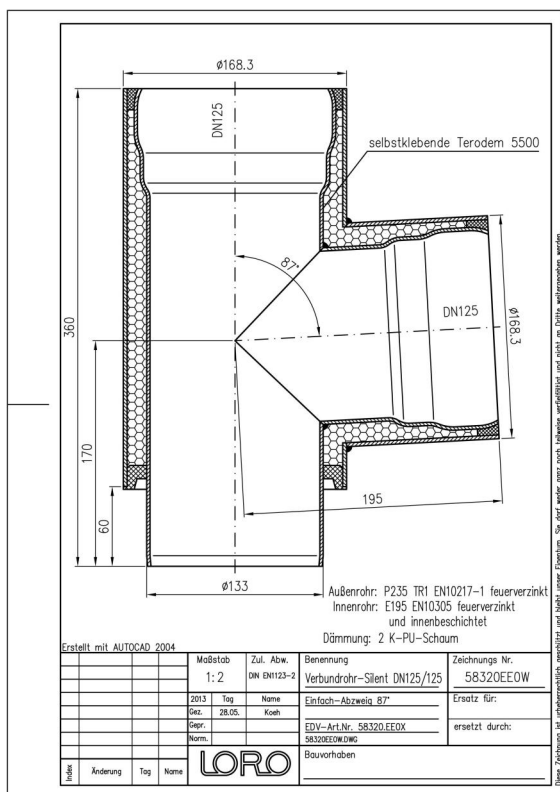

## Dati articolo

|                          |                             |
|--------------------------|-----------------------------|
| Codice EAN               | 4038088026052               |
| Classe ETIM              | EC003025                    |
| Diametro nominale        | DN 125, DN 125              |
| Lunghezza/grado nominale | 87                          |
| Misure esterne (AxLxP)   | 168 x 283 x 360 mm          |
| Peso                     | 11,70 Kg (STK)              |
| Gruppo prodotti          | 3                           |
| Numero tariffa doganale  | 73089098                    |
| Materiale / Colore       | Stahl feuerverzinkt, Silber |

## Note d'uso

Silent für erhöhte Schallschutzanforderungen  
Doppelwandiges Abflussrohr, DN 40 - DN 150  
bestehend aus:Innenrohr mit Schallschutzfolie,PU-  
Dämmschicht, Baustoffklasse B2, FCKW-  
frei,Außenrohr (Innenrohr- und Außenrohr aus LORO-X  
Stahlabflussrohr) Achtung: Sonderanfertigung - keine  
Lagerware.

## Download



Alles online

[Istruzioni di installazione \(PDF\)](#)

CAD 2D (DXF)

[Disegno dimensionale \(PDF\)](#)

CAD (DWG)

[Brochure \(PDF\)](#)