


## LORO-X SILENT COMPOSITE BRANCH 87 DEGREE DN 150/150

LORO-Composite pipe branch SILENT 87 degrees DN 150/150

### Beskrivelse

LORO-X compound pipe branch, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 87 degrees, DN150

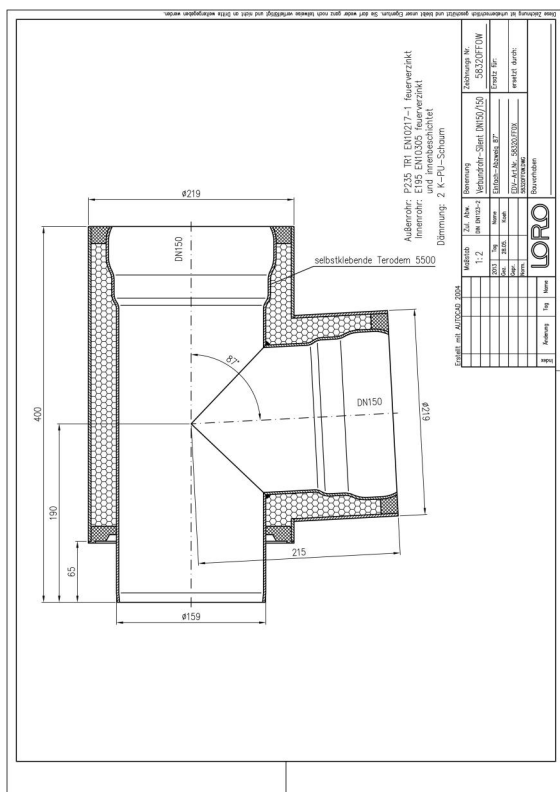

### Artikeldata

|                     |                             |
|---------------------|-----------------------------|
| EAN-kode            | 4038088026069               |
| ETIM Klasse         | EC003025                    |
| Nominal diameter    | DN 150, DN 150              |
| Nominal længde/grad | 87                          |
| Ydermål (HxBxL)     | 219 x 330 x 400 mm          |
| Vægt                | 13,80 Kg (STK)              |
| Produktgruppe       | 3                           |
| Toldtarifnummer     | 73089098                    |
| Materiale / Farve   | Stahl feuerverzinkt, Silber |

### Brugsanvisning

Silent für erhöhte Schallschutzanforderungen  
Doppelwandiges Abflussrohr, DN 40 - DN 150  
bestehend aus: Innenrohr mit Schallschutzfolie, PU-Dämmschicht, Baustoffklasse B2, FCKW-frei, Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

### Downloads



Alles online

[Installationsvejledning \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Måltægning \(PDF\)](#)

[CAD \(DWG\)](#)

[Brochure \(PDF\)](#)