LORO-X SILENT COMPOSITE BRANCH 45 DEGREE DN 50/50

LORO-Composite pipe branch SILENT 45 degrees DN 50/50

Opis

LORO-X compound pipe branch, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 45 degrees, DN50

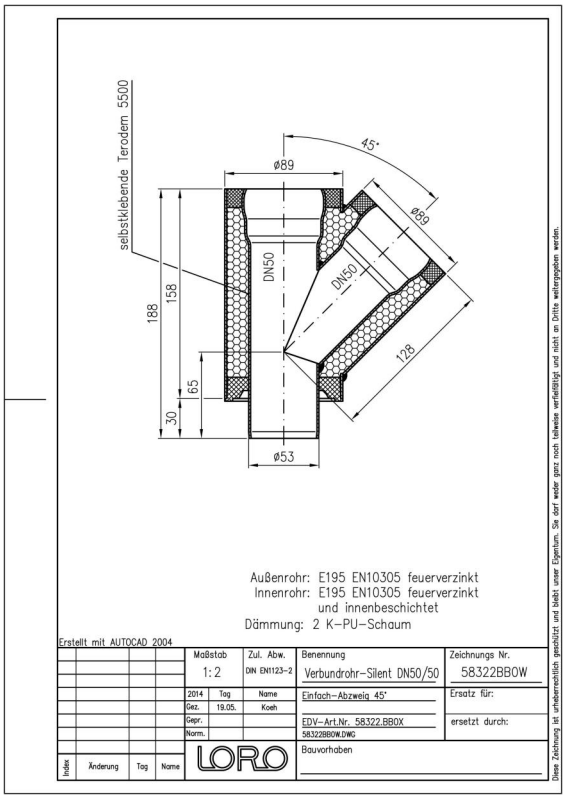

Podaci o artiklu

EAN kod	4038088026076
ETIM klasa	EC003025
Nazivni promjer	DN 50, DN 50
Nazivna duljina/stupanj	45
Vanjske mjere (VxŠxD)	89 x 166 x 188 mm
Težina	1,60 Kg (STK)
Grupa proizvoda	3
Carinski tarifni broj	73089098
Materijal / Boja	Stahl feuerverzinkt, Silber

Napomena za upotrebu

Silent für erhöhte Schallschutzanforderungen Doppelwandiges Abflussrohr, DN 40 - DN 150 bestehend aus:Innenrohr mit Schallschutzfolie,PU-Dämmschicht, Baustoffklasse B2, FCKW-frei,Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

Preuzimanja

Alles online

Upute za ugradnju (PDF)
Dimenzijski crtež (PDF)
Prospekt (PDF)
CAD 2D (DXF)
CAD (DWG)