


LORO-X SILENT COMPOSITE BRANCH 45 DEGREE DN 150/150

LORO-Composite pipe branch SILENT 45 degrees DN 150/150

Beschrijving

LORO-X compound pipe branch, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 45 degrees, DN150

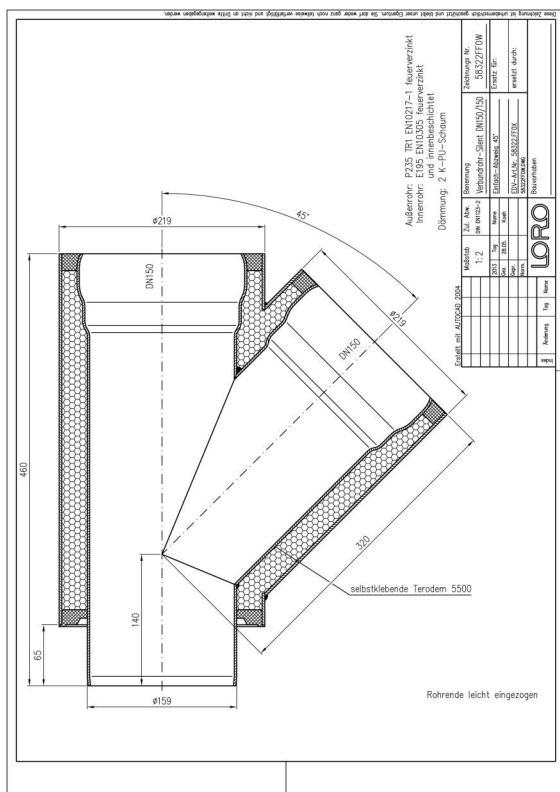

Artikelgegevens

EAN-code	4038088026113
ETIM Klasse	EC003025
Nominale diameter	DN 150, DN 150
Nominale lengte/graad	45
Buitenafmetingen (HxBxL)	219 x 413 x 460 mm
Gewicht	21,50 Kg (STK)
Productgroep	3
Douanetariefnumme	73089098

Materiaal / Kleur	Stahl feuerverzinkt, Silber
--------------------------	------------------------------------

Gebruiksaanwijzing

Silent für erhöhte Schallschutzanforderungen
Doppelwandiges Abflussrohr, DN 40 - DN 150
bestehend aus:Innenrohr mit Schallschutzfolie,PU-
Dämmschicht, Baustoffklasse B2, FCKW-
frei,Außenrohr (Innenrohr- und Außenrohr aus LORO-X
Stahlabflussrohr) Achtung: Sonderanfertigung - keine
Lagerware.

Downloads



Alles online

[Installatiehandleiding \(PDF\)](#)

CAD 2D (DXF)

[Maattekening \(PDF\)](#)

CAD (DWG)

[Brochure \(PDF\)](#)