

**LORO-X SILENT COMPOSITE REDUCED BRANCH 88 DEGREE DN 100/70**

## LORO-Composite Pipe-Red. branches SILENT 87 degrees DN 100/70

### Description

LORO-X compound pipe reducing branch, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 87 degrees, DN100/70




## Données de l'article

|                                |                             |
|--------------------------------|-----------------------------|
| Code EAN                       | 4038088026144               |
| Classe ETIM                    | EC003025                    |
| Diamètre nominal               | DN 100, DN 70               |
| Longueur/degré nominal         | 88                          |
| Dimensions extérieures (HxLxP) | 133 x 204 x 210 mm          |
| Poids                          | 6,70 Kg (STK)               |
| Groupe de produits             | 3                           |
| Numéro tarifaire douanier      | 73089098                    |
| Matériau / Couleur             | Stahl feuerverzinkt, Silber |

## Note d'utilisation

Silent für erhöhte Schallschutzanforderungen  
Doppelwandiges Abflussrohr, DN 40 - DN 150  
bestehend aus:Innenrohr mit Schallschutzfolie,PU-  
Dämmschicht, Baustoffklasse B2, FCKW-  
frei,Außenrohr (Innenrohr- und Außenrohr aus LORO-X  
Stahlabflussrohr) Achtung: Sonderanfertigung - keine  
Lagerware.

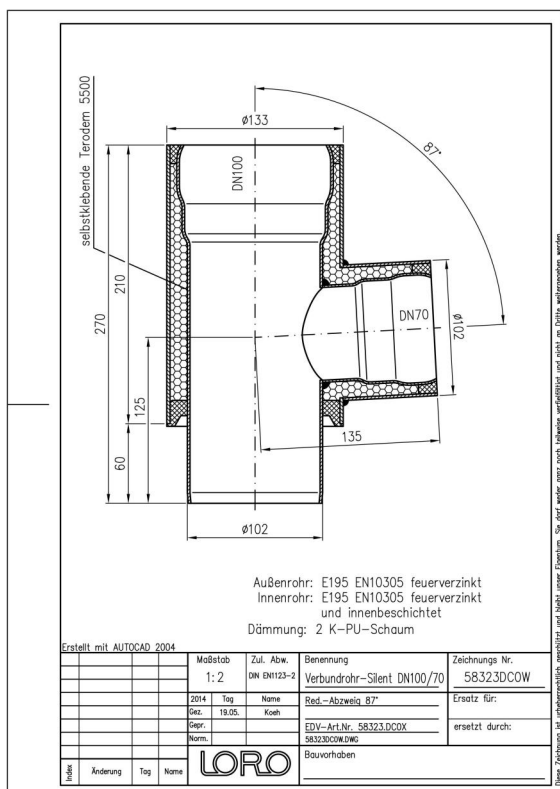

## Téléchargements



Alles online

[Notice d'installation \(PDF\)](#)

CAD 2D (DXF)

[Dessin dimensionnel \(PDF\)](#)

CAD (DWG)

[Brochure \(PDF\)](#)