


LORO-X SILENT COMPOSITE REDUCED BRANCH 88 DEGREE DN 150/100

LORO-Composite Pipe-Red. branches SILENT 87 degrees DN 150/100

Descripción

LORO-X compound pipe reducing branch, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 87 degrees, DN150/100

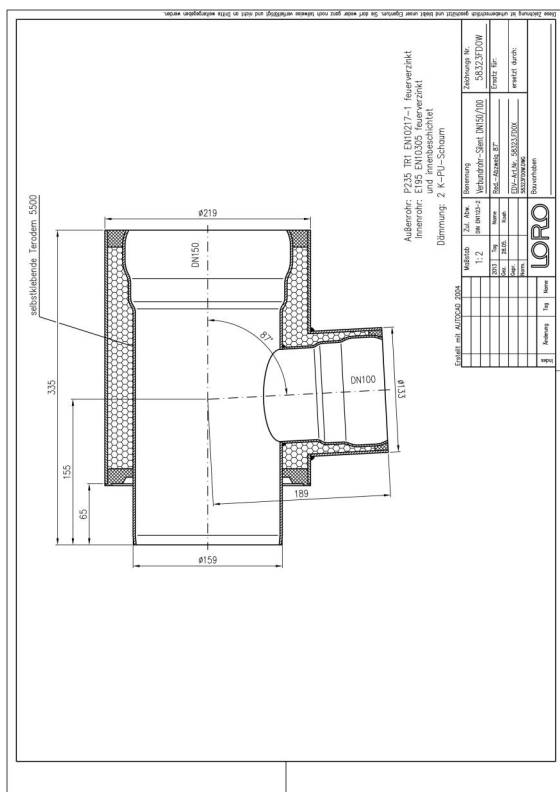

Datos del artículo

Código EAN	4038088038338
Clase ETIM	EC003025
Diámetro nominal	DN 150, DN 100
Longitud/grado nominal	88
Medidas exteriores (AxAxL)	219 x 302 x 355 mm
Peso	12,50 Kg (STK)
Grupo de productos	3
Número de arancel aduanero	73089098
Material / Color	Stahl feuerverzinkt, Silber

Nota de uso

Silent für erhöhte Schallschutzanforderungen
Doppelwandiges Abflussrohr, DN 40 - DN 150
bestehend aus:Innenrohr mit Schallschutzfolie,PU-
Dämmschicht, Baustoffklasse B2, FCKW-
frei,Außenrohr (Innenrohr- und Außenrohr aus LORO-X
Stahlabflussrohr) Achtung: Sonderanfertigung - keine
Lagerware.

Descargas



Alles online

[Instrucciones de instalación \(PDF\)](#)

CAD 2D (DXF)

[Dibujo dimensional \(PDF\)](#)

CAD (DWG)

[Folleto \(PDF\)](#)