

## LORO-X SILENT COMPOSITE REDUCED BRANCH 88 DEGREE DN 150/100

LORO-Composite Pipe-Red. branches SILENT 87 degrees DN 150/100

### Description

LORO-X compound pipe reducing branch, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 87 degrees, DN150/100




### Données de l'article

|                                |                             |
|--------------------------------|-----------------------------|
| Code EAN                       | 4038088038338               |
| Classe ETIM                    | EC003025                    |
| Diamètre nominal               | DN 150, DN 100              |
| Longueur/degré nominal         | 88                          |
| Dimensions extérieures (HxLxP) | 219 x 302 x 355 mm          |
| Poids                          | 12,50 Kg (STK)              |
| Groupe de produits             | 3                           |
| Numéro tarifaire douanier      | 73089098                    |
| Matériau / Couleur             | Stahl feuerverzinkt, Silber |

### Note d'utilisation

Silent für erhöhte Schallschutzanforderungen  
Doppelwandiges Abflussrohr, DN 40 - DN 150  
bestehend aus: Innenrohr mit Schallschutzfolie, PU-Dämmschicht, Baustoffklasse B2, FCKW-frei, Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

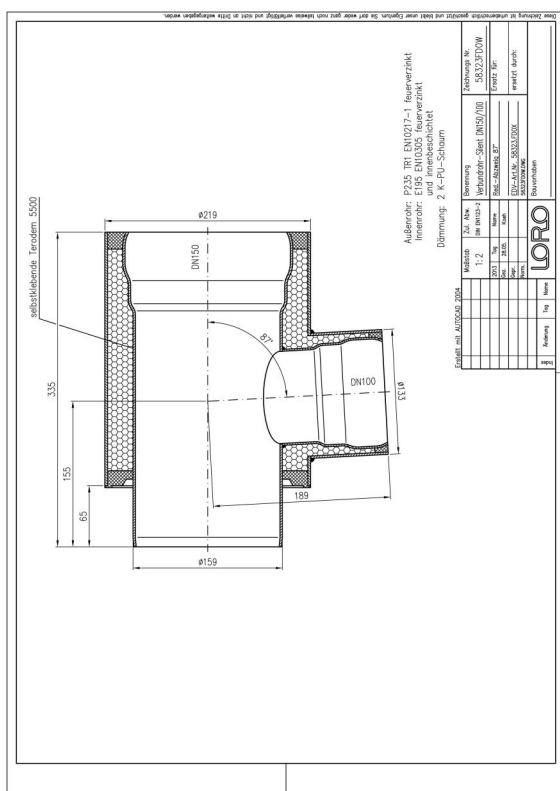

### Téléchargements



Alles online

[Notice d'installation \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Dessin dimensionnel \(PDF\)](#)

[CAD \(DWG\)](#)

[Brochure \(PDF\)](#)