


LORO-X SILENT COMPOSITE REDUCED BRANCH 88 DEGREE DN 150/125

LORO-Composite Pipe-Red. branches SILENT 87 degrees DN 150/125

Descriere

LORO-X compound pipe reducing branch, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 87 degrees, DN150/125

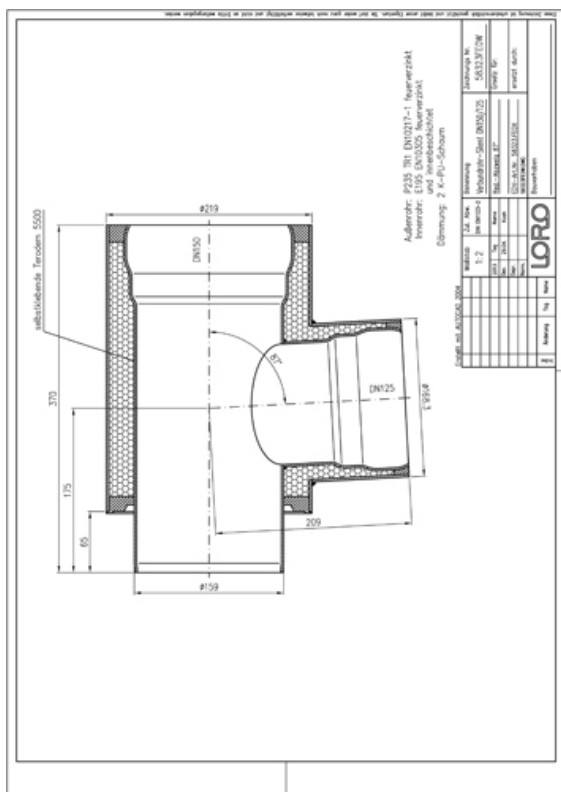

Date articol

Cod EAN	4038088038345
Clasă ETIM	EC003025
Diametru nominal	DN 150, DN 125
Lungime/grad nominal	88
Dimensiuni exterioare (ÎxLxA)	219 x 323 x 370 mm
Greutate	17,40 Kg (STK)
Grupă de produse	3
Număr tarif vamal	73089098
Material / Culoare	Stahl feuerverzinkt, Silber

Notă de utilizare

Silent für erhöhte Schallschutzanforderungen
Doppelwandiges Abflussrohr, DN 40 - DN 150
bestehend aus: Innenrohr mit Schallschutzfolie, PU-Dämmschicht, Baustoffklasse B2, FCKW-frei, Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

Descărcări



Alles online

[Instrucțiuni de montaj \(PDF\)](#)
[CAD 2D \(DXF\)](#)

[Desen CAD \(PDF\)](#)
[CAD \(DWG\)](#)

[Broșură \(PDF\)](#)