


LORO-X SILENT COMPOSITE REDUCED BRANCH 88 DEGREE DN 150/125

LORO-Composite Pipe-Red. branches SILENT 87 degrees DN 150/125

Popis

LORO-X compound pipe reducing branch, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 87 degrees, DN150/125

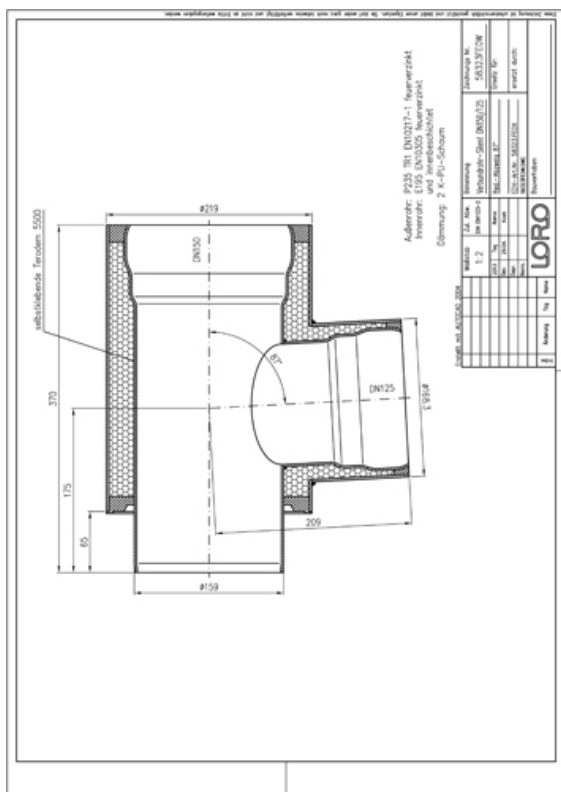

Údaje o artikli

EAN kód	4038088038345
ETIM trieda	EC003025
Menovitý priemer	DN 150, DN 125
Menovitá dĺžka/stupeň	88
Vonkajšie rozmery (VxŠxH)	219 x 323 x 370 mm
Hmotnosť	17,40 Kg (STK)
Skupina produktov	3
Colný sadzobník	73089098
Materiál / Farba	Stahl feuerverzinkt, Silber

Pokyny na použitie

Silent für erhöhte Schallschutzanforderungen
Doppelwandiges Abflussrohr, DN 40 - DN 150
bestehend aus: Innenrohr mit Schallschutzfolie, PU-
Dämmschicht, Baustoffklasse B2, FCKW-
frei, Außenrohr (Innenrohr- und Außenrohr aus LORO-X
Stahlabflussrohr) Achtung: Sonderanfertigung - keine
Lagerware.

Na stiahnutie



Alles online

[Návod na montáž \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Rozmerový výkres \(PDF\)](#)

[CAD \(DWG\)](#)

[Prospekt \(PDF\)](#)