


## LORO-X SILENT COMPOSITE REDUCED BRANCH 88 DEGREE DN 150/125

LORO-Composite Pipe-Red. branches SILENT 87 degrees DN 150/125

### Popis

LORO-X compound pipe reducing branch, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 87 degrees, DN150/125

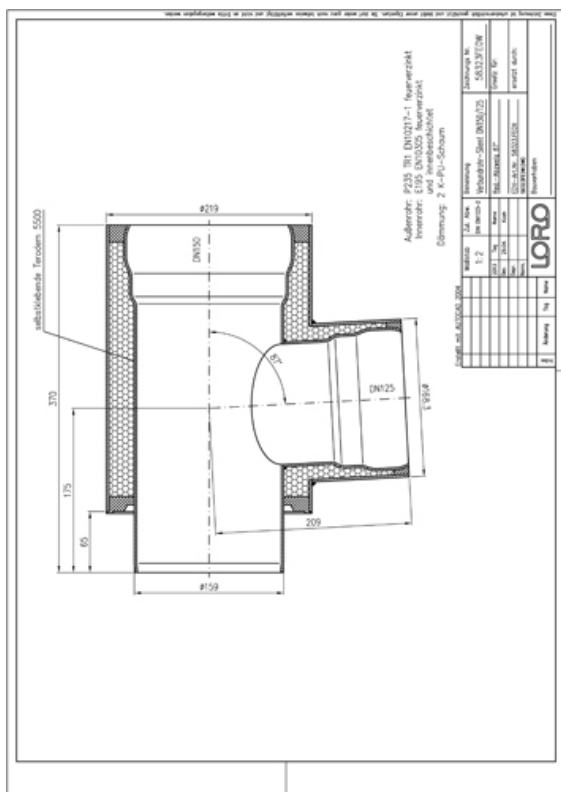

### Údaje o artiklu

|                        |                             |
|------------------------|-----------------------------|
| EAN kód                | 4038088038345               |
| ETIM třída             | EC003025                    |
| Jmenovitý průměr       | DN 150, DN 125              |
| Jmenovitá délka/stupeň | 88                          |
| Vnější rozměry (VxŠxD) | 219 x 323 x 370 mm          |
| Hmotnost               | 17,40 Kg (STK)              |
| Skupina produktů       | 3                           |
| Celní sazebník         | 73089098                    |
| Materiál / Barva       | Stahl feuerverzinkt, Silber |

### Pokyny k použití

Silent für erhöhte Schallschutzanforderungen  
Doppelwandiges Abflussrohr, DN 40 - DN 150  
bestehend aus: Innenrohr mit Schallschutzfolie, PU-  
Dämmschicht, Baustoffklasse B2, FCKW-  
frei, Außenrohr (Innenrohr- und Außenrohr aus LORO-X  
Stahlabflussrohr) Achtung: Sonderanfertigung - keine  
Lagerware.

### Ke stažení



Alles online

[Návod k instalaci \(PDF\)](#)  
[CAD 2D \(DXF\)](#)

[Výkres rozměrů \(PDF\)](#)  
[CAD \(DWG\)](#)

[Prospekt \(PDF\)](#)