

LORO-X SILENT COMPOSITE REDUCING BRANCH 45 DEGREE DN 50/32

LORO-Composite Pipe-Red. branches SILENT 45 degrees DN 50/32

Text pentru caietul de sarcini

LORO-X compound pipe reducing branch, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 45 degrees, DN50/32




Date articol

Cod EAN	4038088093146
Clasă ETIM	EC003025
Diametru nominal	DN 50, DN 32
Lungime/grad nominal	45
Dimensiuni exterioare (ÎxLxA)	89 x 198 x 227 mm
Greutate	2,30 Kg (STK)
Grupă de produse	3
Număr tarif vamal	73089098
Material / Culoare	Stahl feuerverzinkt, Silber

Notă de utilizare

Silent für erhöhte Schallschutzanforderungen Doppelwandiges Abflussrohr, DN 40 - DN 150 bestehend aus:Innenrohr mit Schallschutzfolie,PU-Dämmschicht, Baustoffklasse B2, FCKW-frei,Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

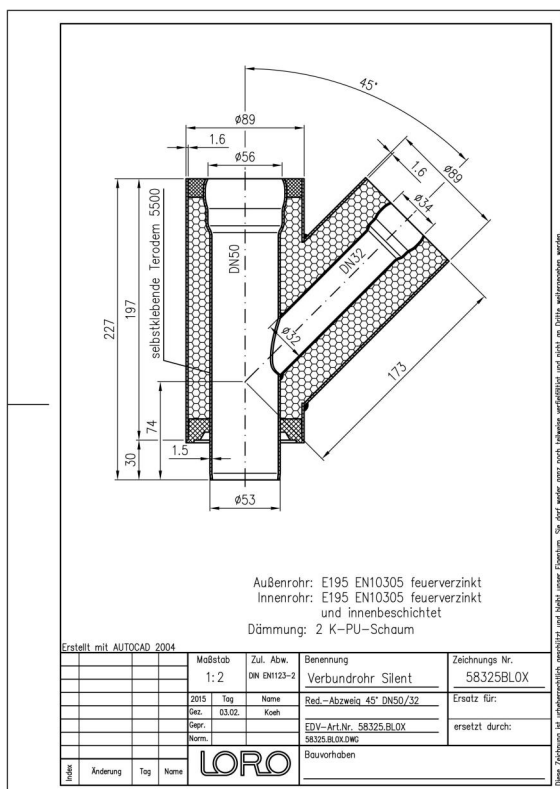

Descărcări



Alles online

[Instrucțiuni de montaj \(PDF\)](#)
[CAD 2D \(DXF\)](#)

[Desen CAD \(PDF\)](#)
[CAD \(DWG\)](#)

[Broșură \(PDF\)](#)