LORO-X SILENT COMPOSITE REDUCING BRANCH 45 DEGREE DN 50/32

LORO-Composite Pipe-Red. branches SILENT 45 degrees DN 50/32

Text pre výberové konanie

LORO-X compound pipe reducing branch, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 45 degrees, DN50/32

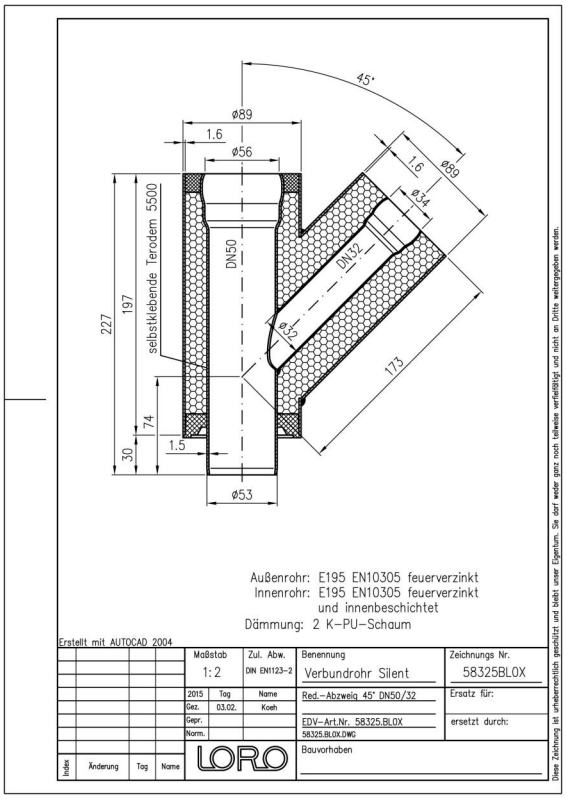

Údaje o artikli

EAN kód	**4038088093146**
ETIM trieda	**EC003025**
Menovitý priemer	**DN 50, DN 32**
Menovitá dĺžka/stupeň	**45**
Vonkajšie rozmery (VxŠxH)	**89 x 198 x 227 mm**
Hmotnosť	**2,30 Kg (STK)**
Skupina produktov	**3**
Colný sadzobník	**73089098**
Materiál / Farba	**Stahl feuerverzinkt, Silber**

Pokyny na použitie

Silent für erhöhte Schallschutzanforderungen Doppelwandiges Abflussrohr, DN 40 - DN 150 bestehend aus:Innenrohr mit Schallschutzfolie,PU-Dämmschicht, Baustoffklasse B2, FCKW-frei,Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

Na stiahnutie

Návod na montáž (PDF)
CAD 2D (DXF)
Rozmerový výkres (PDF)
CAD (DWG)
Prospekt (PDF)

Alles online