

LORO-X SILENT COMPOSITE REDUCING BRANCH 45 DEGREE DN 50/32

LORO-Composite Pipe-Red. branches SILENT 45 degrees DN 50/32

Tekst za troškovnik

LORO-X compound pipe reducing branch, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 45 degrees, DN50/32




Podaci o artiklu

EAN kod	4038088093146
ETIM klasa	EC003025
Nazivni promjer	DN 50, DN 32
Nazivna duljina/stupanj	45
Vanjske mjere (VxŠxD)	89 x 198 x 227 mm
Težina	2,30 Kg (STK)
Grupa proizvoda	3
Carinski tarifni broj	73089098
Materijal / Boja	Stahl feuerverzinkt, Silber

Napomena za upotrebu

Silent für erhöhte Schallschutzanforderungen
Doppelwandiges Abflussrohr, DN 40 - DN 150
bestehend aus: Innenrohr mit Schallschutzfolie, PU-Dämmschicht, Baustoffklasse B2, FCKW-frei, Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

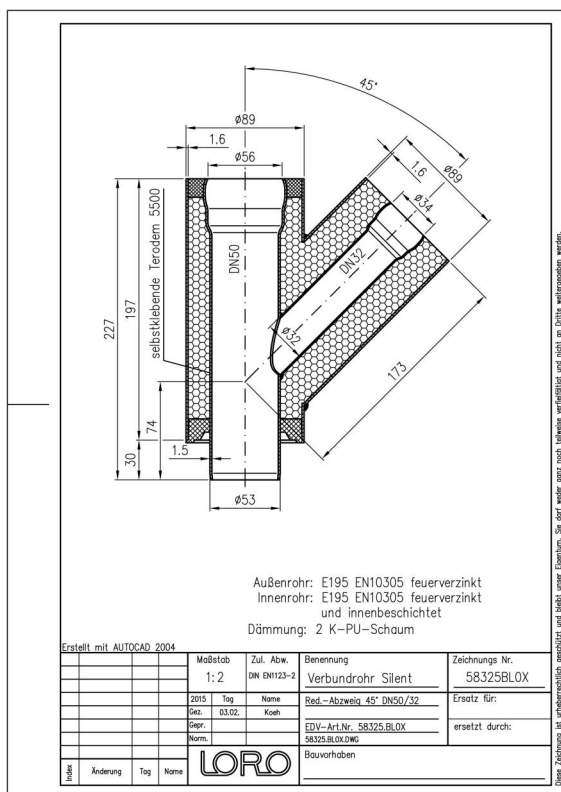

Preuzimanja



Alles online

[Upute za ugradnju \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Dimenzijski crtež \(PDF\)](#)

[CAD \(DWG\)](#)

[Prospekt \(PDF\)](#)