

## LORO-X SILENT COMPOSITE REDUCING BRANCH 45 DEGREE DN 50/32

LORO-Composite Pipe-Red. branches SILENT 45 degrees DN 50/32

### Texto para caderno de encargos

LORO-X compound pipe reducing branch, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 45 degrees, DN50/32




### Dados do artigo

|                            |                             |
|----------------------------|-----------------------------|
| Código EAN                 | 4038088093146               |
| Classe ETIM                | EC003025                    |
| Diâmetro nominal           | DN 50, DN 32                |
| Comprimento/grau nominal   | 45                          |
| Medidas exteriores (AxLxP) | 89 x 198 x 227 mm           |
| Peso                       | 2,30 Kg (STK)               |
| Grupo de produtos          | 3                           |
| Número de pauta aduaneira  | 73089098                    |
| Material / Cor             | Stahl feuerverzinkt, Silber |

### Nota de utilização

Silent für erhöhte Schallschutzanforderungen Doppelwandiges Abflussrohr, DN 40 - DN 150 bestehend aus: Innenrohr mit Schallschutzfolie, PU-Dämmschicht, Baustoffklasse B2, FCKW-frei, Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

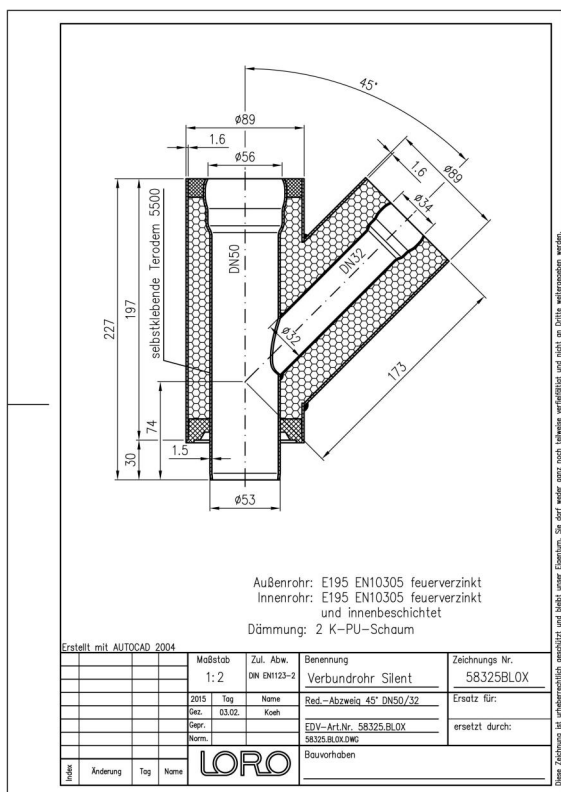

### Transferências



Alles online

[Instruções de instalação \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Desenho cotado \(PDF\)](#)

[CAD \(DWG\)](#)

[Brochura \(PDF\)](#)