

LORO-X SILENT COMPOSITE REDUCING BRANCH 45 DEGREE DN 50/32

LORO-Composite Pipe-Red. branches SILENT 45 degrees DN 50/32

Text pro výběrové řízení

LORO-X compound pipe reducing branch, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 45 degrees, DN50/32




Údaje o artiklu

EAN kód	4038088093146
ETIM třída	EC003025
Jmenovitý průměr	DN 50, DN 32
Jmenovitá délka/stupeň	45
Vnější rozměry (VxŠxD)	89 x 198 x 227 mm
Hmotnost	2,30 Kg (STK)
Skupina produktů	3
Celní sazebník	73089098
Materiál / Barva	Stahl feuerverzinkt, Silber

Pokyny k použití

Silent für erhöhte Schallschutzanforderungen Doppelwandiges Abflussrohr, DN 40 - DN 150 bestehend aus: Innenrohr mit Schallschutzfolie, PU-Dämmschicht, Baustoffklasse B2, FCKW-frei, Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

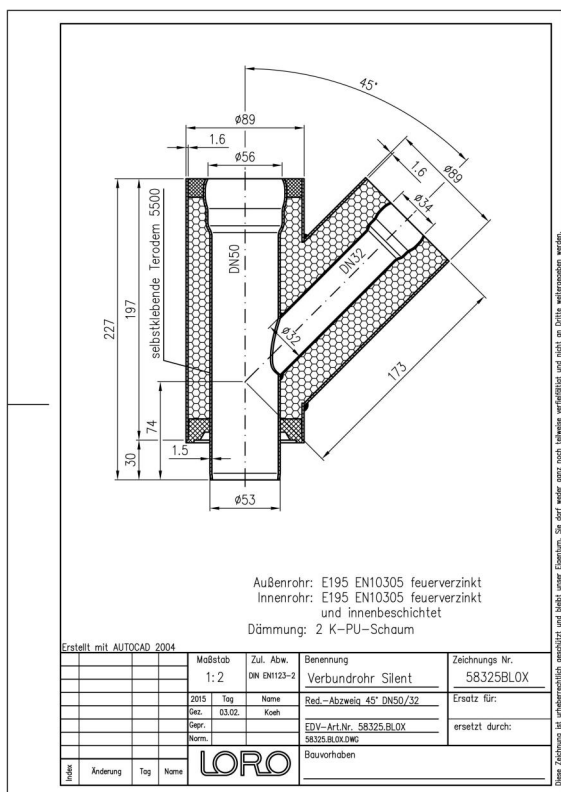

Ke stažení



Alles online

[Návod k instalaci \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Výkres rozměrů \(PDF\)](#)

[CAD \(DWG\)](#)

[Prospekt \(PDF\)](#)